



RoHS Compliant

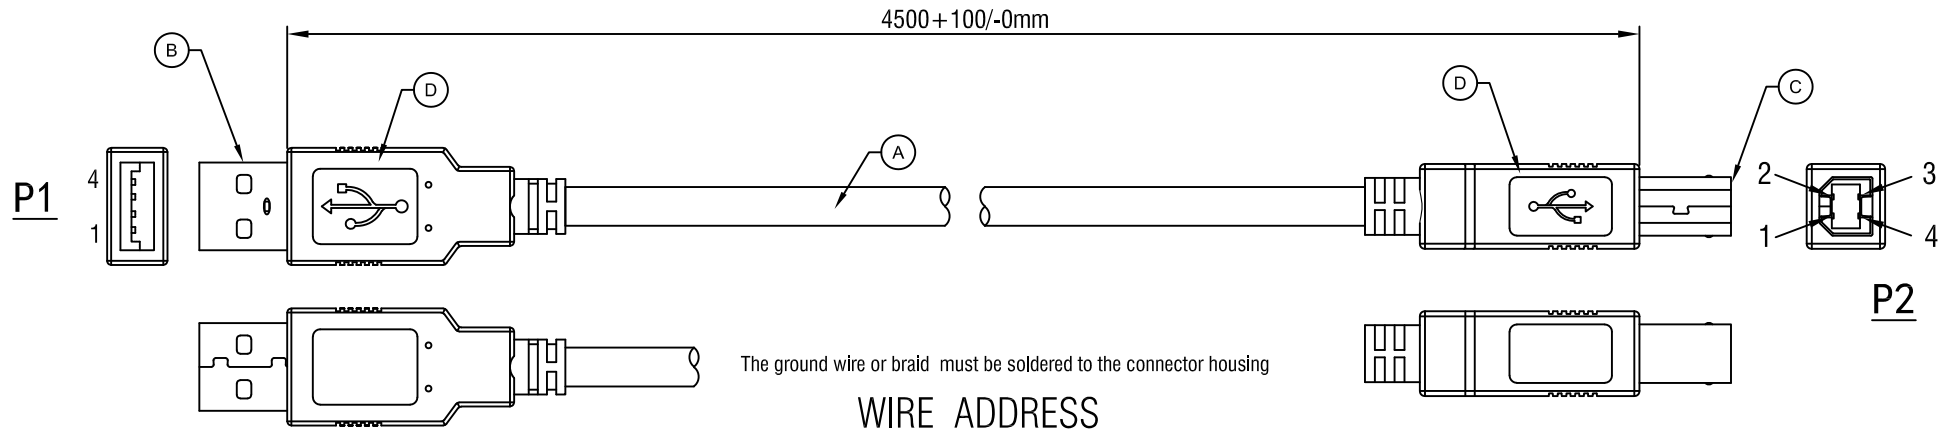

The ground wire or braid must be soldered to the connector housing

WIRE ADDRESS

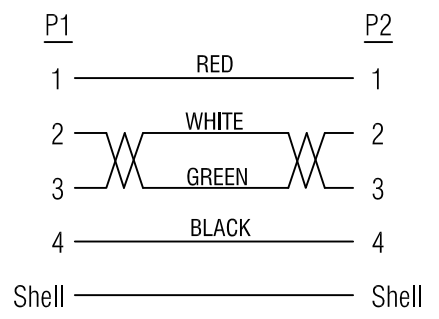

Electrical Test:
 1.100% TEST OPEN SHORT MIS-WIRE.
 2.CONTACT RESISTANCE:3Ω MAX.
 3.INSULATION RESISTANCE:5MΩ MIN.
 4.HI-POT:300V DC/10MS.

D	45P PVC BLACK		G	ROLINE USB 2.0 Cable, A - B, M/M, black, 4.5 m		SECOMP
C	USB 2.0 B MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U ^m)	1	PCS	Item	11.02.8845	
B	USB 2.0 A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U ^m)	1	PCS	Draw	Sam Date: 2014.12.05	
A	UL2725 28AWG*1P+24AWG*2C+ADB,OD=5.0mm,BLACK PVC JACKET.	1	PCS	Approval		
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16 BOM.NO: 10183	
				Sample NO.	Drawings of 1 (2) Proportion: 1:1 Unit(mm)	