




Datenblatt - Fiche technique - Data sheet

21.15.0975


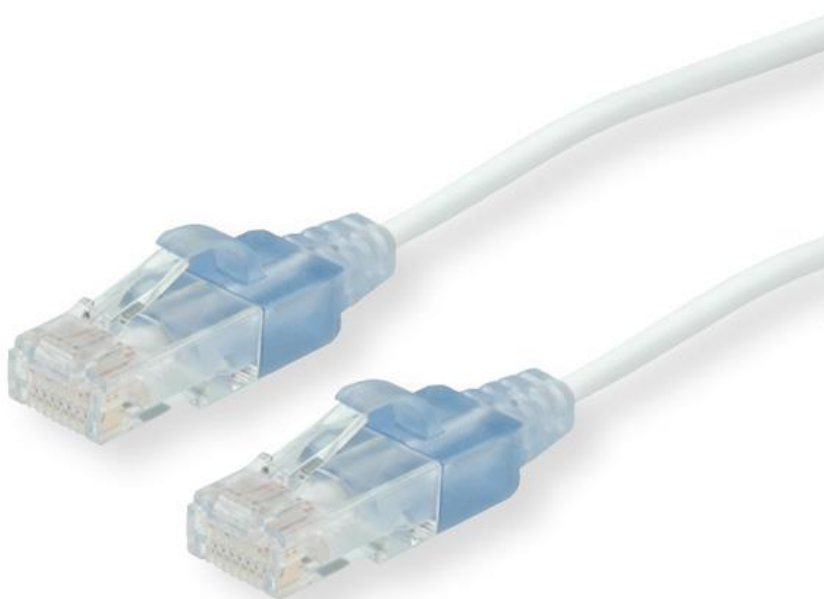


ROLINE UTP-Patchkabel Kat.6A, slim, weiss, 5,0 m

Cordon ROLINE UTP Cat.6A / 10 Gigabit, slim, blanc, 5,0 m


ROLINE UTP Patch Cord Cat.6A, slim, white, 5.0 m

1		2		3		4		5		6		7		8		9		10		11		12		13	
MOLDING																		DATE	REV.	REVISION		DRAFTING		CHECKED	
																		2016.8.17	A0	NEW		LM		JZY	

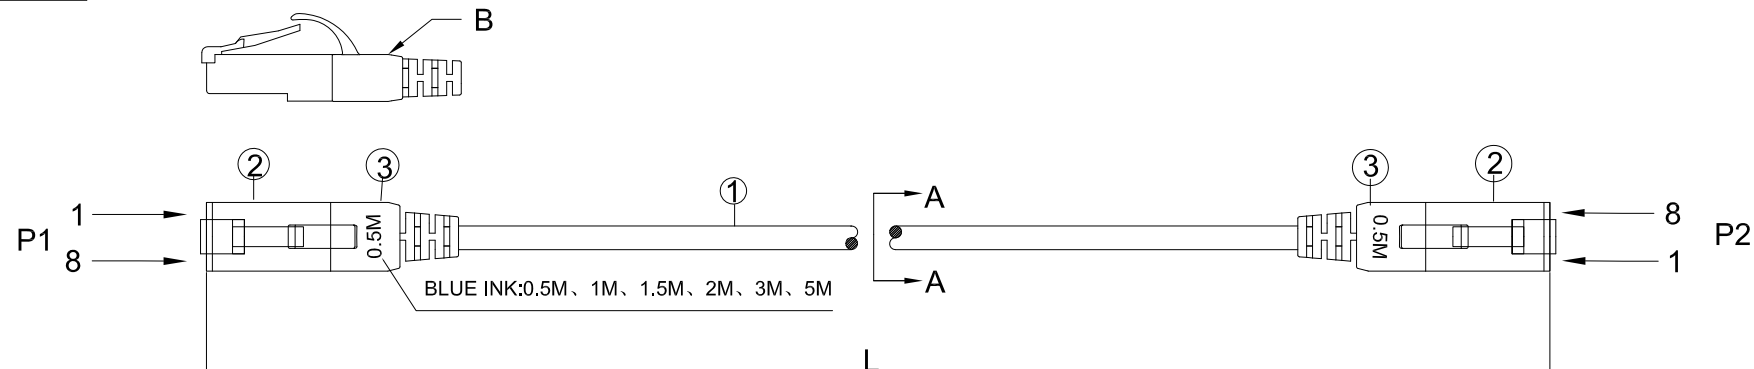

INK MARKING:roline CAT.6A UTP PATCH CONFORMS TO ANSI/TIA-568-C.2 & ISO/IEC 11801 30AWGX4P

Item No.	Length	Tolerance
21.15.0970	0.5m	20mm
21.15.0971	1m	20mm
21.15.0974	1.5m	30mm
21.15.0972	2m	30mm
21.15.0973	3m	30mm
21.15.0975	5m	80mm




SEC:A-A

INSULATION:[HDPE OD=0.48±0.05mm]X4P

JACKET:PVC OD=3.0±0.2mm WH

CONDUCTOR:[30AWG(7/0.10±0.008mm) BC]X4P



orange 1
white/orange

green 2
white/green

blue 3
white/blue

brown 4
white/brown

Minimum Bending Radius : ≥ 25 mm

SECOMP

③	BOOT	PVC Transparent Blue	2	Unless specified on the drawing, tolerances are per the follows: X. ±0.20 X° ±3 .X ±0.10 .X° ±0.3 .XX ±0.05	DRAW. NO		TITLE	ROLINE UTP Patch Cord Cat6A, slim, White											
②	PLUG	8P8C 50U RJ45	2		CUSTOMER														
①	CABLE	CAT.6A PVC 30AWG*4P WH	1		CUST' R P/N		DRAW	LM	DATE	2016.08.17									
No.	TITLE	DESCRIPTION	Q' TY		SCALE		CHECK	JZY	DATE	2016.08.17									
Material			Part Number		Note	☒ RoHS	☐ Reach	☐ GP	☐ HF	☐ Other	WL			UNIT	mm	APPROVED	LANDER	SHEET	