



Datenblatt - Fiche technique - Data sheet

21.15.1200




ROLINE S/FTP-(PiMF-)Patchkabel Kat.6, LSOH, gelb, 10m


Cordon ROLINE Cat.6 S/FTP LSOH jaune, 10,0m

ROLINE S/FTP Patch Cord Cat.6, halogen-free, yellow, 10m

DATE	REV	DESCRIPTION	BY	CHKD
3/13	A/0	NEW	WZY	YZG

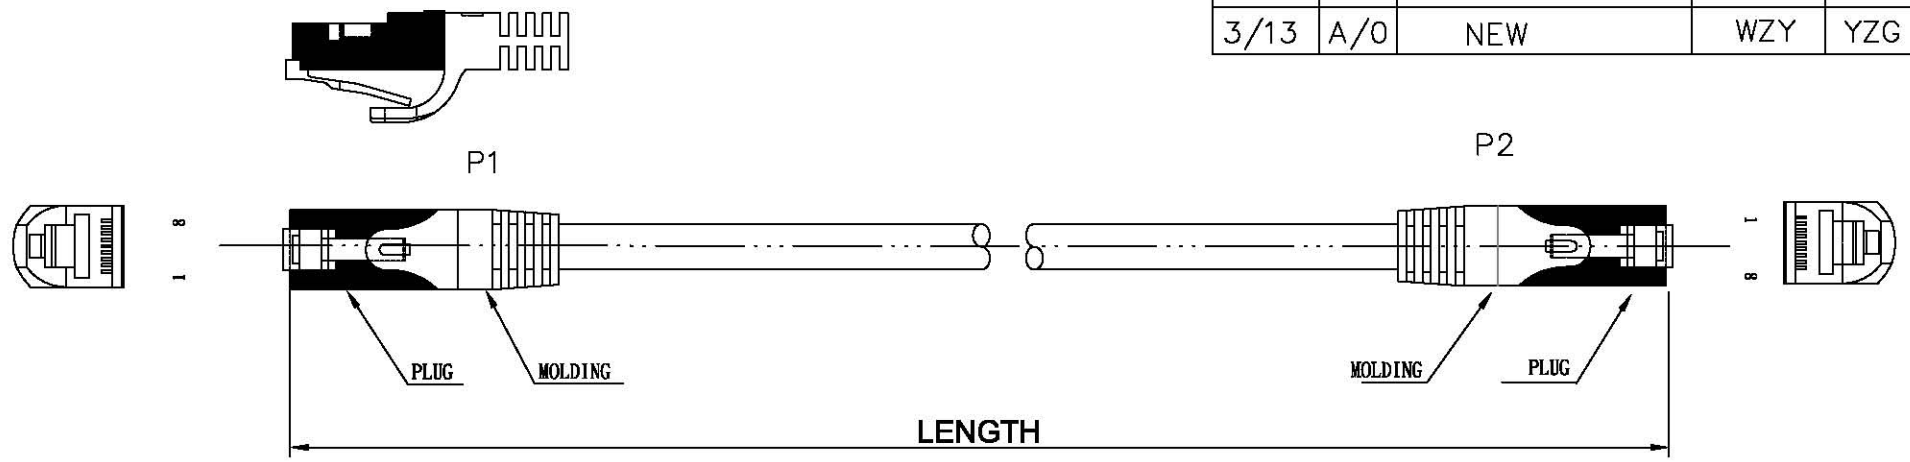


Marking: <LP727> roline CAT.6 SFTP 26AWGX4P TYPE LSOH IEC 332.3C -ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2-1

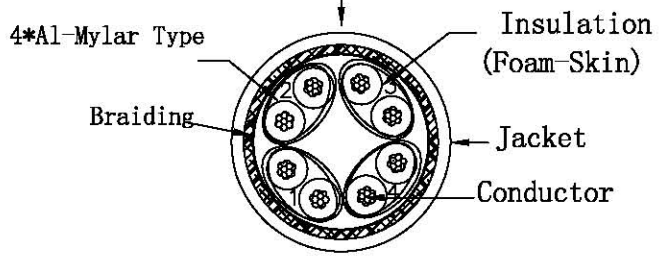

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	7
	5	WHT/BLU	8
4	7	WHT/BRN	4
	8	BRN	5

Conductor	Bare Copper 26AWG 7/0.152±0.005mm
Insulation	Thickness:MIN at any point:0.2mm MAX AVG:0.35mm Diameter:1.05±0.05mm
Jacket	LSOH Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:6.1±0.2mm

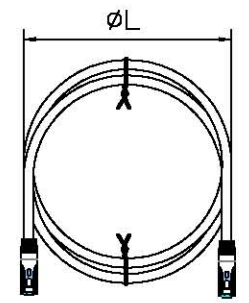

WIRE	CAT.6 PIMF STR 26AWG*4P
PLUG	YS-17 8P8C 50u"
Length	XXM
COLOR	GRAY852

Unless specified on the drawing, tolerances are per the follows:
 . ± 1
 .X ± 0.2
 .XX ± 0.05

Rotronic Co., Ltd.

3RD			DRAW.NO	00307	ITEM	21.15.18XX		
			DEPARTMENT	R&D	DRAW	ZhaoyangWu	DATE	2009/3/13
			SCALE		CHECKER		APPROVAL	
			UNIT	MM	SHEET	1	OF	1

Remark#

21.15.1830	ROLINE S/FTP Cable Cat.6,LSOH,gre,0.5m
21.15.1831	ROLINE S/FTP Cable Cat.6,LSOH,gre,1m
21.15.1832	ROLINE S/FTP Cable Cat.6,LSOH,gre,2m
21.15.1833	ROLINE S/FTP Cable Cat.6,LSOH,gre,3m
21.15.1835	ROLINE S/FTP Cable Cat.6,LSOH,gre,5m
21.15.1840	ROLINE S/FTP Cable Cat.6,LSOH,gre,10m
21.15.1845	ROLINE S/FTP Cable Cat.6,LSOH,gre,15m
21.15.1850	ROLINE S/FTP Cable Cat.6,LSOH,gre,20m