

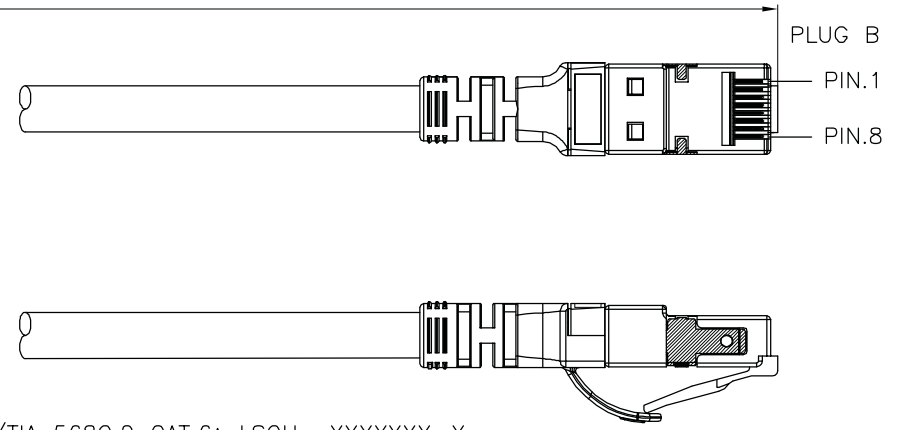
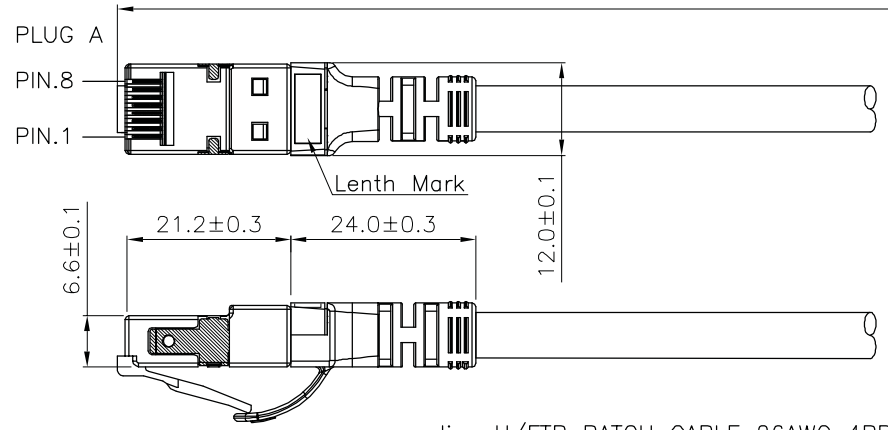


1 2 3 4 5 6

Length±xxmm



roline U/FTP PATCH CABLE 26AWG 4PR ANSI/TIA 568C.2 CAT.6A LSOH XXXXXX-X

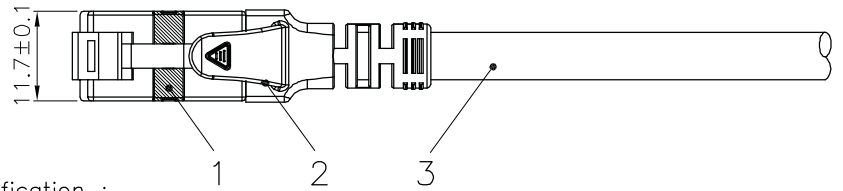

- (1) Jacket Color : Gray(RAL7035)
- (2) Wiring : T568B

item no.	length	tolerance
21.15.1480	0.5M	+20 -0
21.15.1481	1M	+20 -0
21.15.1482	2M	+20 -10
21.15.1483	3M	+20 -10
21.15.1485	5M	+30 -20
21.15.1486	7M	+30 -20
21.15.1487	10M	+30 -20
21.15.1488	15M	+30 -20
21.15.1489	20M	+70 -30

Specification :

Material :

1. RJ45 Plug :
  - 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color
  - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated
  - 1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area
  - 1-4. Shield : Bronze with Nickel plated
2. SR : SR-V95 FOR U/FTP Boot with nose
3. Cable :
  - 3-1. Jacket : LSOH
  - 3-2. Conductor : 26 AWG stranded copper
  - 3-3. Isolation : PE
  - 3-4. Shield : Aluminum Foil Shielded for Each Pair, copper clad with steel
4. Cable structure : U/FTP, 4 twisted pair
5. Minimum Banding Radius: 50mm

item no	21.15.1480	21.15.1481	21.15.1482	21.15.1483	21.15.1485
	21.15.1486	21.15.1487	21.15.1488	21.15.1489	
Desc	ROLINE Cat 6a U/FTP Patch Cord,LSOH.Component Level,gray				
"#": Matching DIM.	DRAWING	25.Aug.2015	byz		
"*": Important DIM.	CHECK	25.Aug.2015	Jane		
Others General DIM.	APPROVAL	25.Aug.2015	Jaimy		
GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DATE		NAME		
	SCALE	1/1 (A4)	UNIT	mm	
	DRAWING NO.				
DRAWING CLASSIFICATION		S	SHEET	1 OF 1	



No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

1 2 3 4 5 6 10cm