

### Installation Guide

#### Revision History:

Rev. 1.0: Initial release

Part no.: 625030000G


Accessory Ordering part no.: 100134700G

#### Compatible VIVOTEK Cameras


Compatible cameras/brackets

IB8367 and IB8338H series


#### Mounting Dimensions

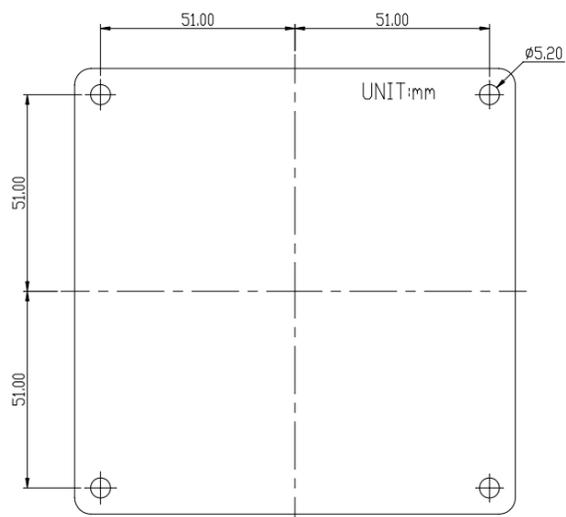


#### Package Contents

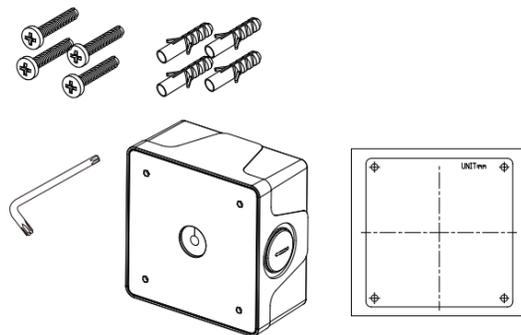


Remove the waterproof cable gland from the top cover.

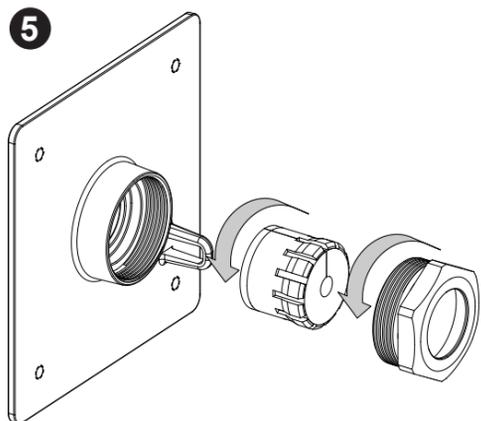


Install the rubber seal, claw, and sealing nut to the combo cable. Tighten up the sealing nut as shown below.

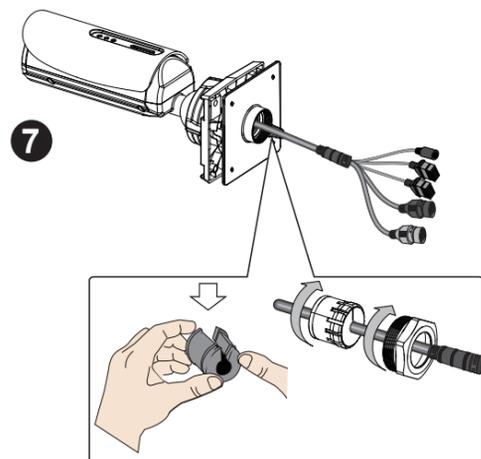

Pass cables through the center hole on the top cover.

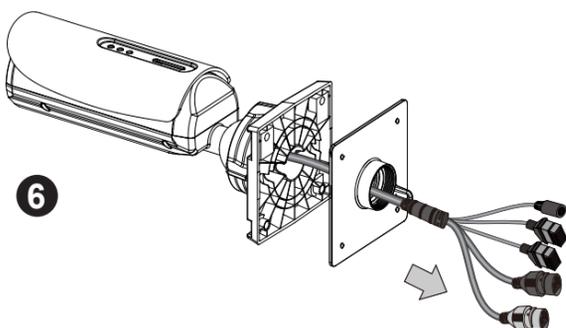


Make sure the pre-cut openings on the seal and the claw are not aligned.

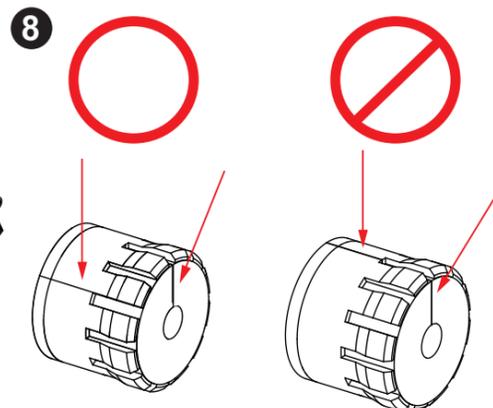


#### Installation


Remove the top cover and unhook the tether wire.

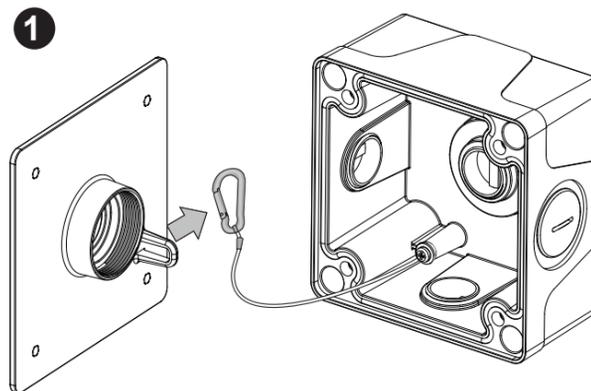


A 3/4" conduit is required for routing the cables with waterproof connection.

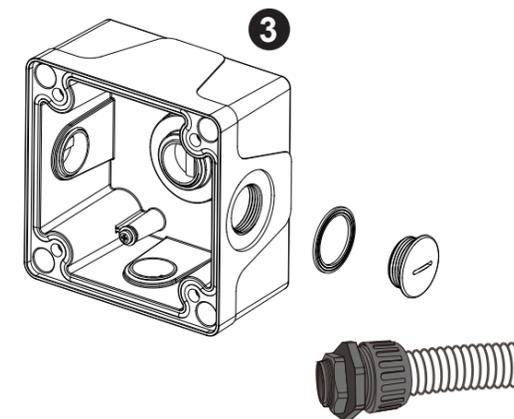


Attach the included alignment sticker to a preferred position. Drill holes on the wall and install the junction box. If space behind the wall allows, you may also pass cables through the wall.

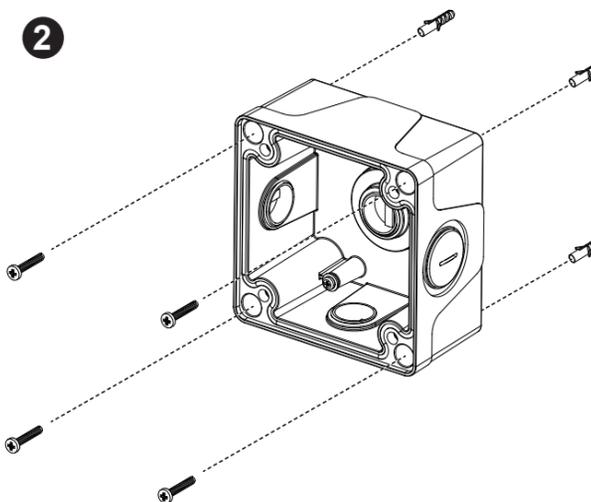


Install the cable gland and pass cables through it.

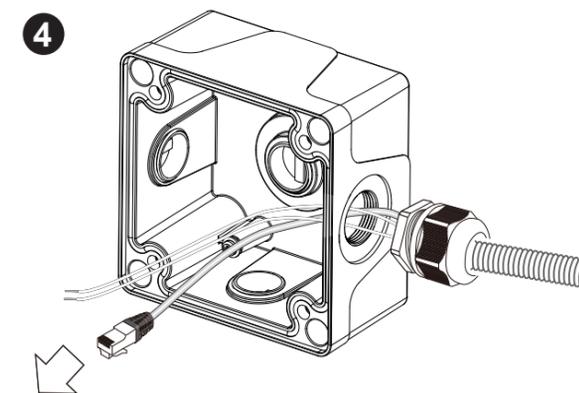


Connect the tether wire between camera and box.

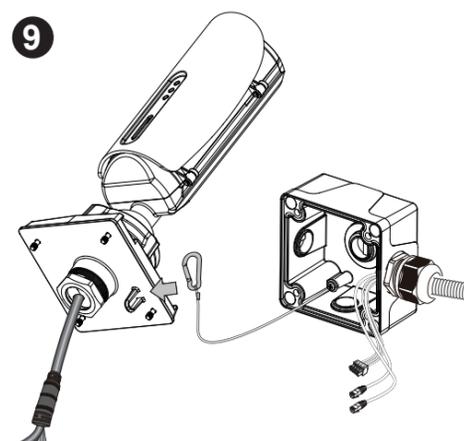

Secure the camera to box using the T25 torx wrench.

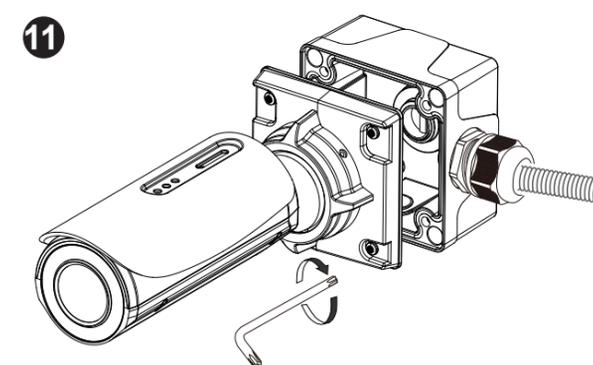

Connect cables and all wiring.

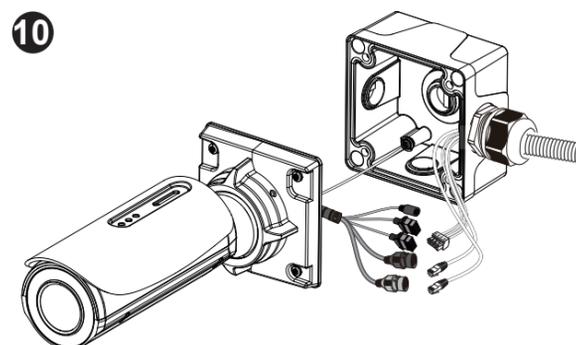

Open a live view console and adjust the shooting direction. Refer to the camera's QIG for more information.

