



Product Number	/
Product Name	YTO 2-in-1 Smartwatch Wireless Charger - Black & Gold Braided Cable, Gold Metal Housing

File Change Log				
Version	Mark	Some details	Adjustments	Revision Time
A.0			Design Master	2025.07.03
				REMARK
				SECOMP

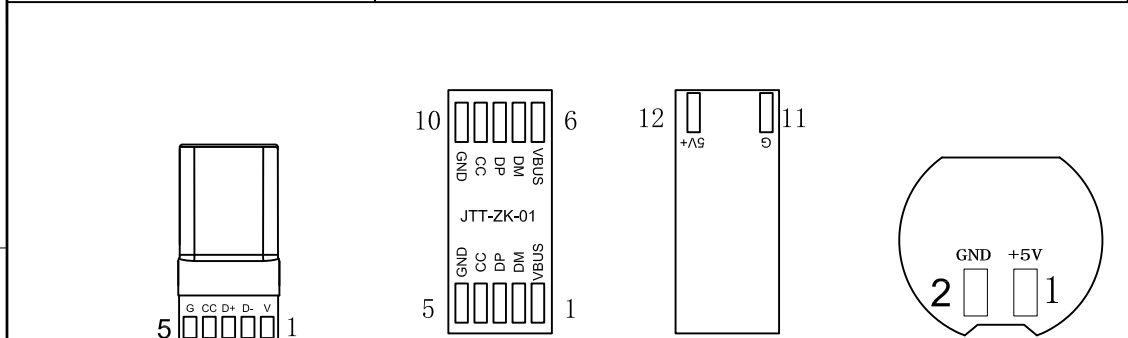

P1/P3 Weld Symbol Drawing P2 Weld Symbol Drawing P4 Weld Symbol Drawing

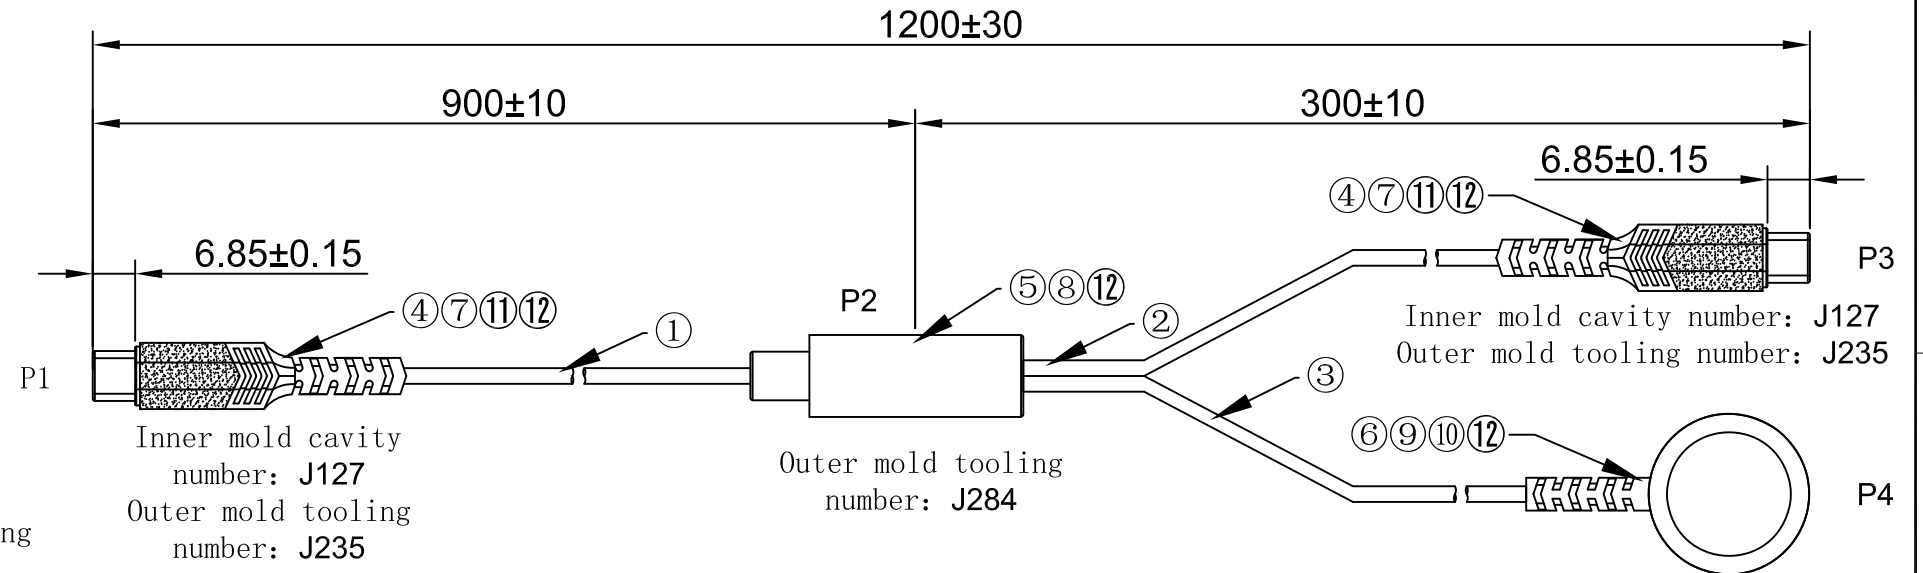

Technical Requirements:

- The product surface must be free from scratches, impurities, excess glue, or other defects.
- The cable body must not have discoloration, cracks, color mismatch, or other defects.
- The plug must not have crushing damage, deformation, or other defects.
- All dimensions indicated on the drawing must be within the specified tolerance range.
- 100% of the products must pass the mobile phone and smartwatch testing.
- Compliance with RoHS (Restriction of Hazardous Substances) directive

Remark: Support 60W(20V5A), data transmission 480 Mbp/s

Wiring diagram		Wiring diagram		Wiring diagram	
P1 conductor	P2	P1 conductor	P2	P1 conductor	P2
1 — Red	1	6 — Red	1	11 — Black	2
2 — White	2	7 — White	2	12 — Red	1
3 — Green	3	8 — Green	3		
4 — Blue	4	9 — Blue	4		
5 — Black	5	10 — Black	5		

⑫	/	Outer mold rubber material	Black TPE, Shore A hardness 95.	A/R	g	
⑪	/	Inner mold rubber material	Black TPE, Shore A hardness 110.	A/R	g	
⑩	/	Plastic face panel	Zinc alloy watch wireless charging face cover, new mold, high-gloss + film lamination, black.	1	PCS	
⑨	/	Zinc alloy shell	Smartwatch wireless charging large case, zinc alloy, large hole, gunmetal color.	1	PCS	
⑧	/	Aluminum alloy shell	Mid-board aluminum shell, 111-26 model, in-mold formed, gold color.	1	PCS	
⑦	/	Aluminum alloy shell	TYPE-C aluminum shell, 6913-17 model, in-mold formed, gold color.	2	PCS	
⑥	DZ263	Watch wireless charging module	Apple Smartwatch Wireless Charging PCB, HC-01.4, 4000 Gauss Magnetic Field Strength	1	PCS	
⑤	/	Mid-PCB	1-to-2 smartwatch charger: Mid-board PCB with PD 5V control.	1	PCS	
④	/	Plug connector	USB Type-C 16P connector, single-row 5-point, dual capacitors, white core (no rubber). gold-plated shell	2	PCS	
③	/	Cable	43/008TS*2C White PVC (OD 3.0mm) overbraided with black & gold diagonal braid → Final OD 3.5mm	300	mm	
②	/	Cable	43/008TS*2C+10/008TC*3C White PVC (OD 3.5mm) overbraided with black & gold diagonal braid → Final OD 4.0mm	300	mm	
①	/	Cable	43/008TS*2C+10/008TC*3C White PVC (OD 3.5mm) overbraided with black & gold diagonal braid → Final OD 4.0mm	900	mm	
serial number	Material code	Material name	Detailed specification description	Quantity used	Unit	Remarks

Tolerances for dimensions without specified tolerances		Product part number: /	
Basic size segmentation	Limit deviation	Customer name:	USB-C To USB-C+Apple Watch Wireless Charger Cable
L<30	±3	Customer part number:	11.02.8342
30<L<120	±5	Product name:	/
120<L<400	±10	Release date	2025.07.03
400<L<1000	±15	Version	A.0
1000<L<2000	±20	proportion	/
ANGLE	±30	Unit	mm
		Number	1/1
		Approve	Review
		Draftsman	
		Yue Shanshan	