


RoHS Compliant

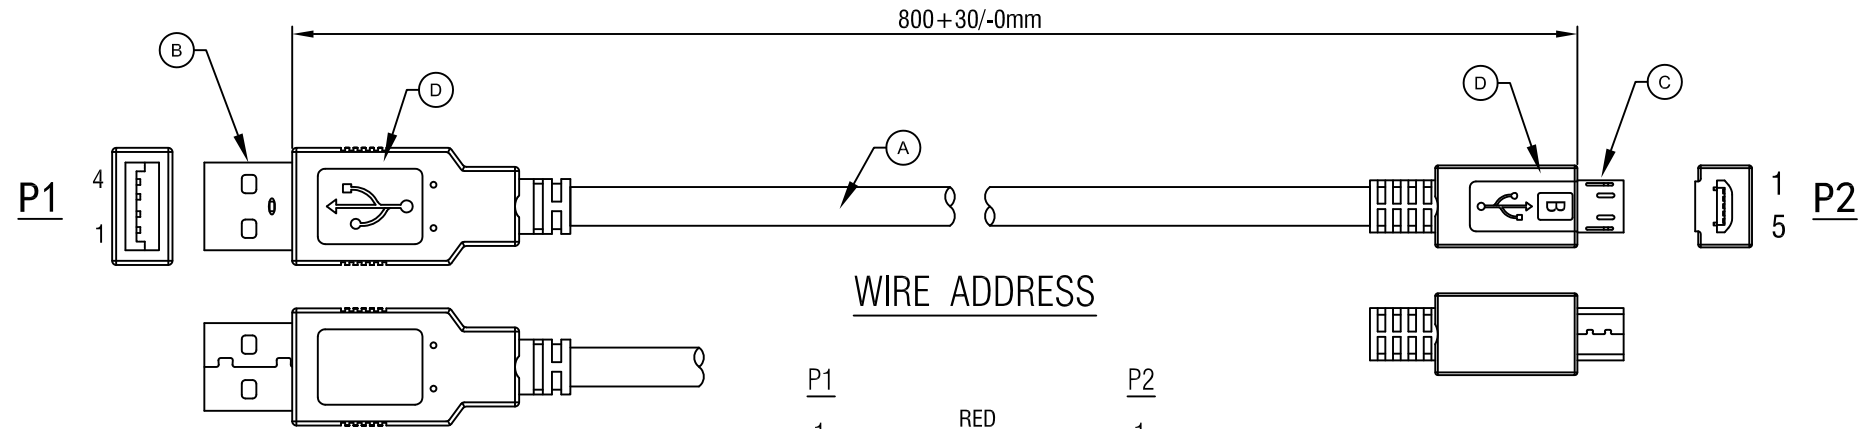

WIRE ADDRESS

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
Shell		Shell

Electrical Test:
 1.100% TEST OPEN SHORT MIS-WIRE.
 2.CONTACT RESISTANCE:3Ω MAX.
 3.INSULATION RESISTANCE:5MΩ MIN.
 4.HI-POT:300V DC/10MS.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Sample NO.	Drawings of 1 (2)	Proportion: 1:1	Unit(mm)	⊕	≡	A4
D	45P PVC BLACK		G	ROLINE USB 2.0 Cable, USB Type A M - Micro USB B M, 0.8m						
C	USB 2.0 Micro B5P MALE(Black Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Item	11.02.8754					
B	USB 2.0 A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Draw	Sam	Date: 2014.12.05				
A	UL2725 28AWG*1P+24AWG*2C+AB OD:5.0mm BLACK COLOR PVC JACKET	1	PCS	Approval						
				Duty	F16	BOM.NO: 10245				

