



RoHS Compliant

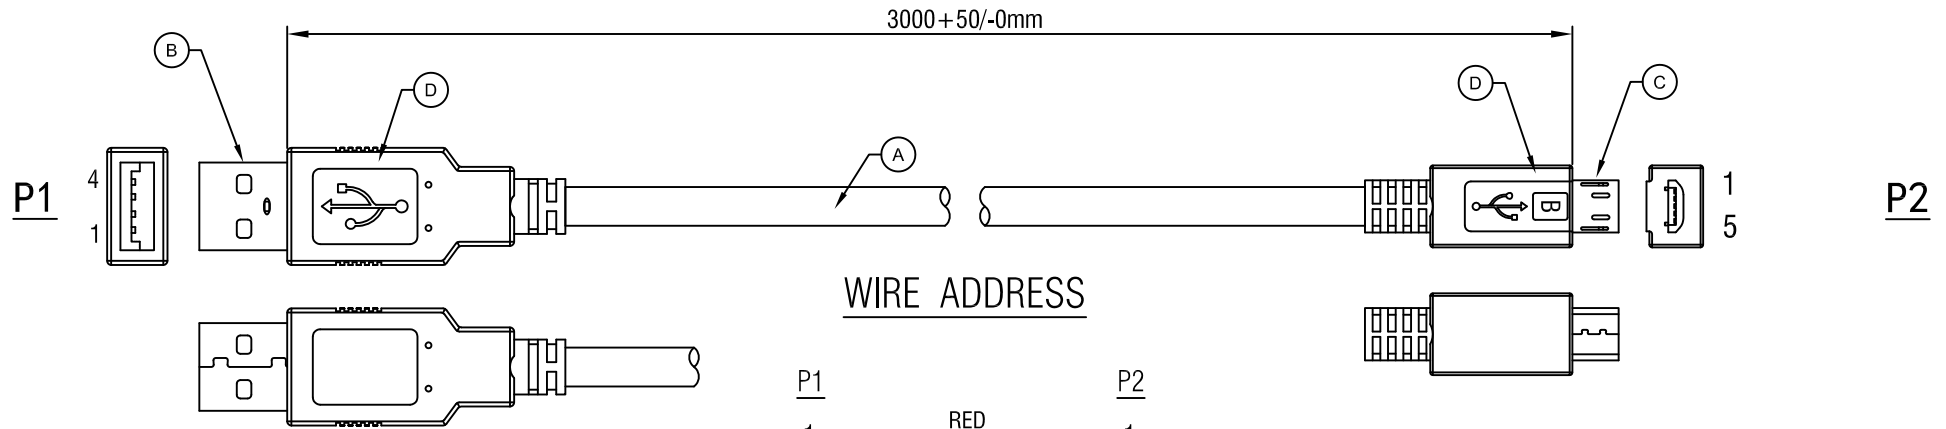

WIRE ADDRESS

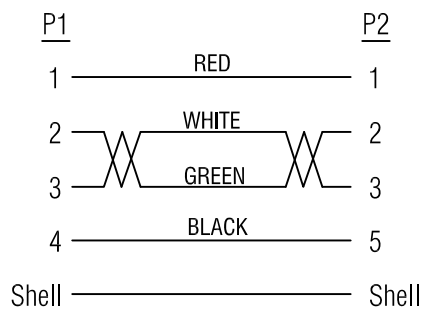

Electrical Test:  
 1.100% TEST OPEN SHORT MIS-WIRE.  
 2.CONTACT RESISTANCE:3Ω MAX.  
 3.INSULATION RESISTANCE:5MΩ MIN.  
 4.HI-POT:300V DC/10MS.

D	45P PVC BLACK		G	ROLINE USB 2.0 Cable, USB Type A M - Micro USB B M, 3.0m		
C	USB 2.0 Micro B5P MALE(Black Insulator, Shell Nickel Plated,Pin Gold Plated 30U <sup>m</sup> )	1	PCS	Item	11.02.8755	
B	USB 2.0 A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U <sup>m</sup> )	1	PCS	Draw	Sam	Date: 2014.11.21
A	UL2725 28AWG*1P+24AWG*2C+AB OD:5.0mm BLACK COLOR PVC JACKET	1	PCS	Approval		
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16	BOM.NO: 10287
				Sample NO.	Drawings of 1 (2) Proportion: 1:1 Unit(mm)	

**SECOMP**