


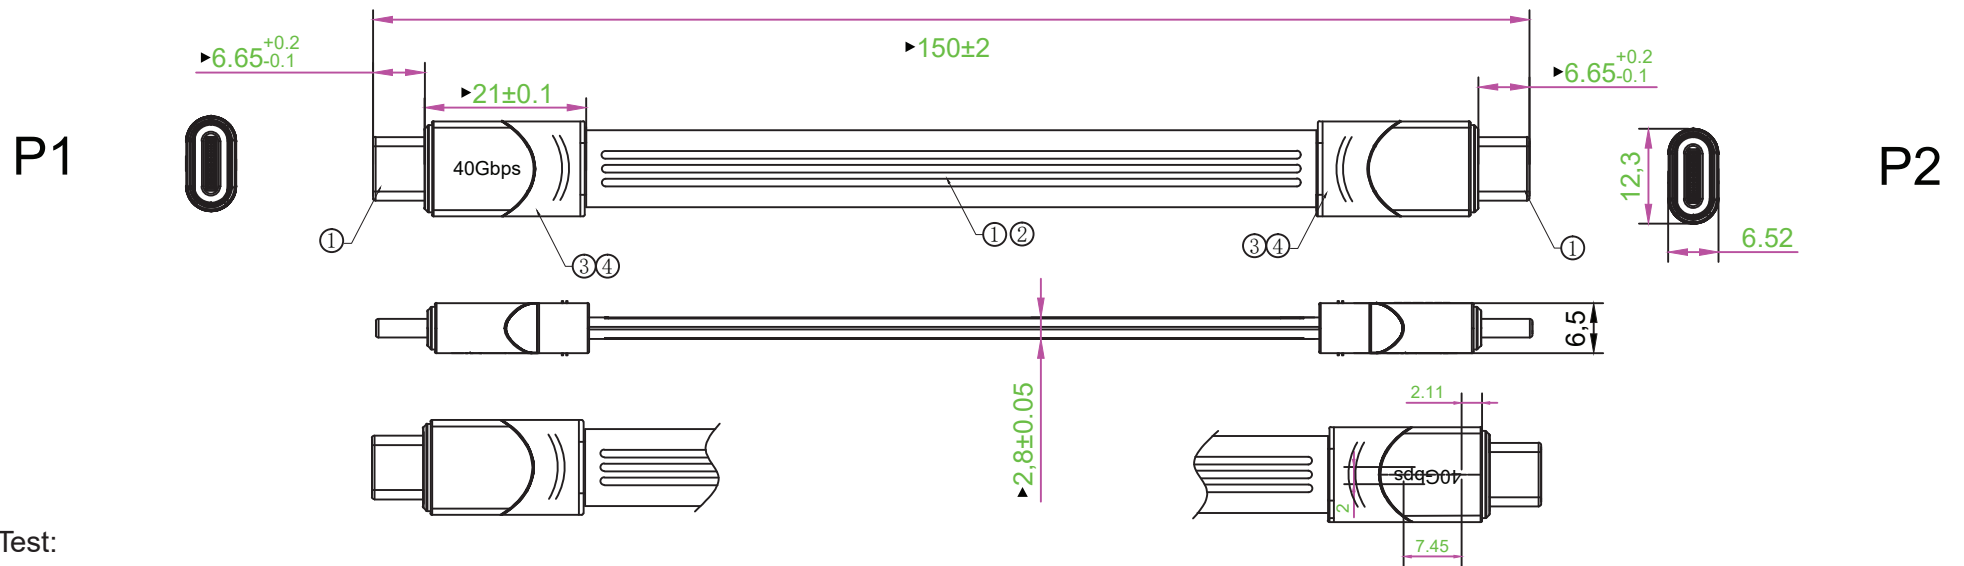


Electrical Test:

1. 100% Test (Open, Short, Miss Wire)
2. Contact Resistance: 3 Ω M
3. Insulation Resistance: 10M Ω M
4. Hi-Pot: DC 300V /10ms
5. Data Transfer Rate: 40G max
6. Power Delivery: 100W max

Specification:

1. Cable: FPC Cable, Type C Plug with Emark, Conductor: Gold Plated 30u
2. Jacket: PVC, Black
3. Outer Mold: PVC, Black
4. Hood: Aluminum Alloy Shell, L:13.2* W:12.3* H:6.52

Pin Assignment

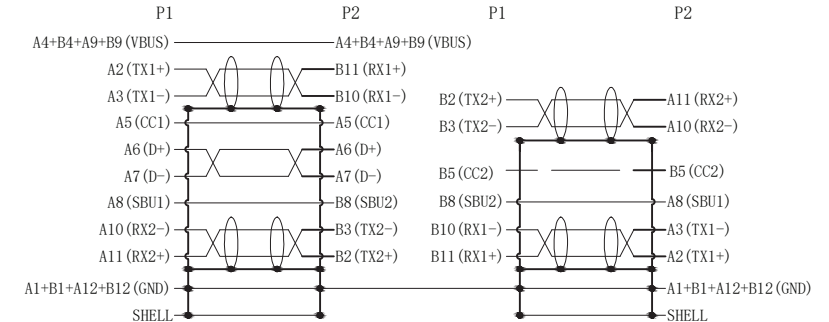

SECOMP

Issue Date : 2023/05/10

Product Name

ROLINE USB4 Gen3x2, 40 Gbit/s,
C-C, M/M, Flat, 15cm

Product No.

11.02.9078

Approve

Allen

Check

Allen

Draw

Oswald

Design

Kuan

Rev.

1
2
3

Date

Contents of Change

Design



Scale 1:1

Unit : mm