



RoHS Compliant

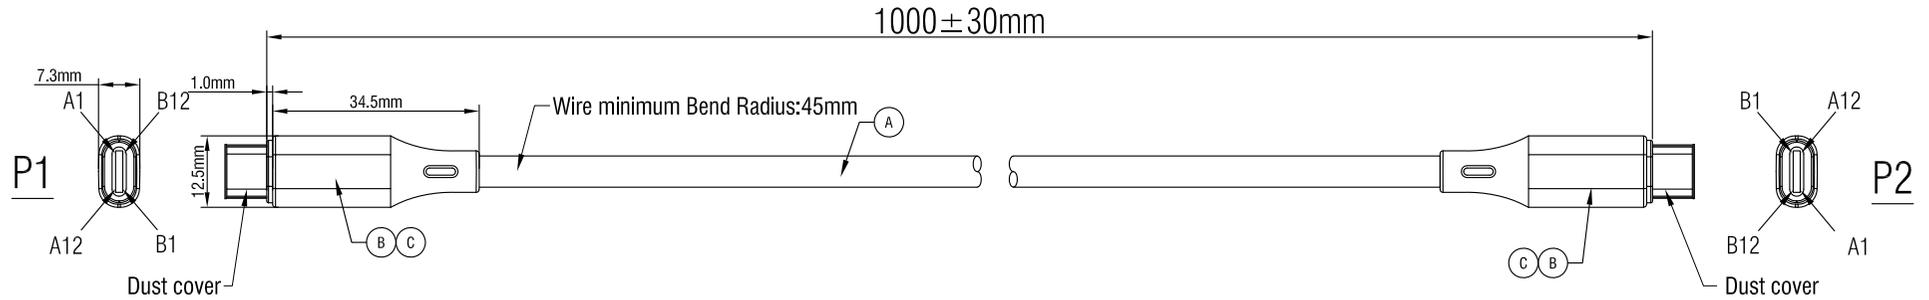

Pin Assignment

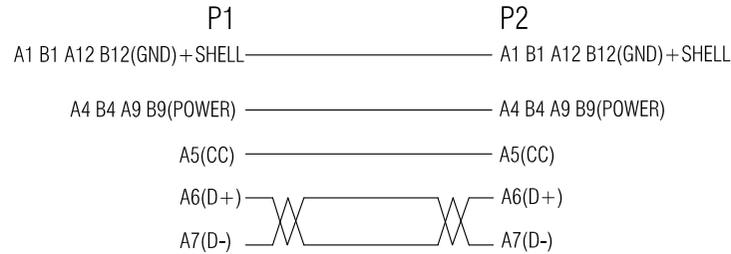

Electrical Test:

1. 100% TEST OPEN SHORT MIS-WIRE.
2. CONTACT RESISTANCE: 3Ω MAX.
3. INSULATION RESISTANCE: 5MΩ MIN.
4. HI-POT: 300V DC/10MS.
5. Support USB 2.0 480Mbps.
6. Support PD 20V/3A 60W MAX.


ROLINE USB 2.0 Silicon cable, C-C, M/M, 1m, BLACK

|        |  |          |      |
|--------|--|----------|------|
| C      | 100A TPE BLACK   |          | G    |
| B      | TYPE C MALE(Black Insulation, Nickel plated)           | 2        | PCS  |
| A      | NON-UL, 30#*4C+24#*4C, OD=4.5mm, BLACK Silicon JACKET. | 1        | PCS  |
| NUMBER | PRODUCT SPECIFICATIONS                                 | Quantity | Unit |


|          |             |                  |
|----------|-------------|------------------|
| Item     | 11.02.9120  |                  |
| Draw     | <i>Kobe</i> | Date: 2024.09.10 |
| Approval |             |                  |
| Duty     | F16         | BOM.NO: 14909    |

**SECOMP**

RoHS Compliant

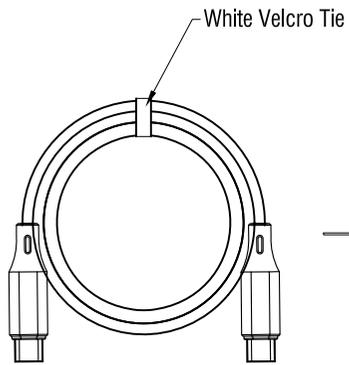

White Velcro Tie

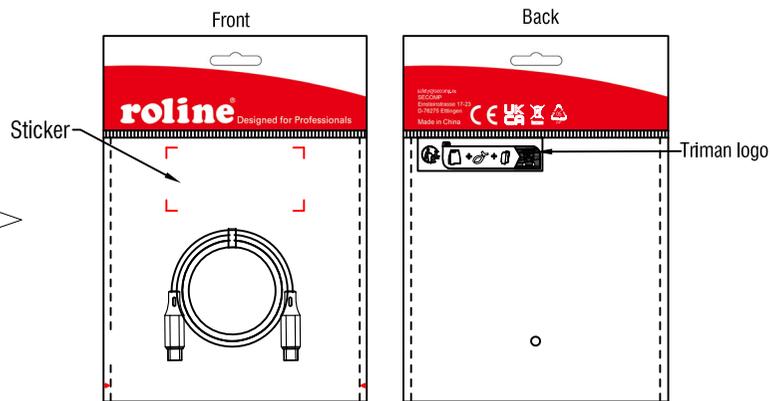

Sticker


Triman logo

1PCS/RLA BAG-S(0.15\*110\*205mm)+ Sticker





Sticker


Carton Sticker(2cm distance from edge of carton)




Box  
(155\*82\*205mm)  
10PCS/CNT

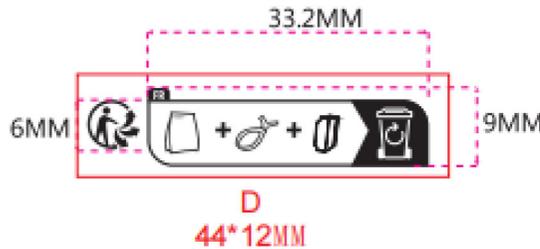

Triman logo

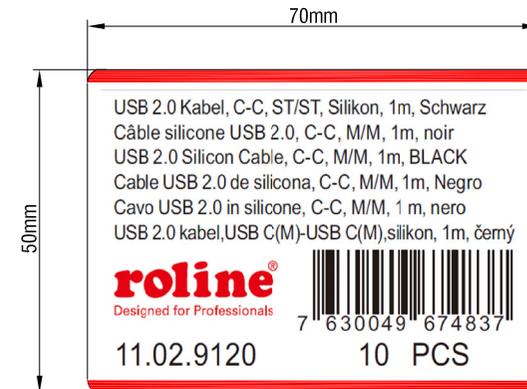

Carton Sticker

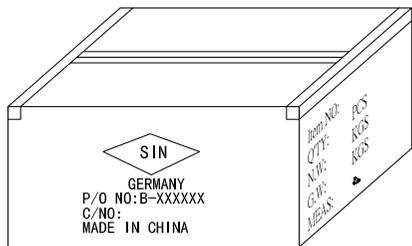

Carton Size:  
(440\*330\*220mm)  
100PCS/CTN

|   |             |  |
|---|-------------|--|
| ROLINE USB 2.0 Silicon cable,C-C,M/M,1m,BLACK |             |  |
| Item  | 11.02.9120  |  |
| Draw  | <i>Kobe</i> | Date: 2024.09.10                           |
| Approval                                      |             |  |
| Duty  | F16         | BOM.NO:14909                               |
| Sample NO.                                    | RLA240724-1 | Drawings of 2 (2) Proportion: 1:1 Unit(mm) |

**SECOMP**



A4