



RoHS Compliant

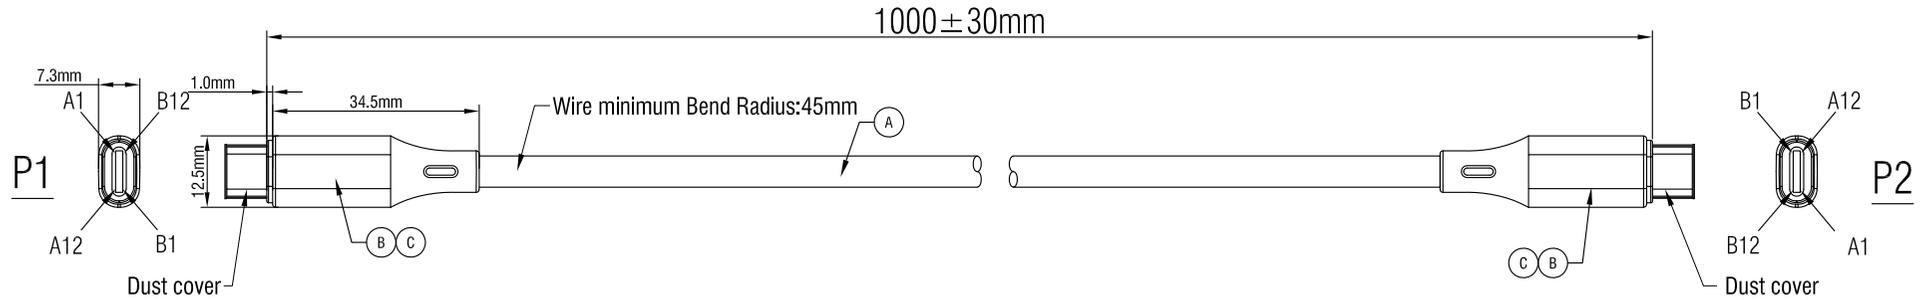

Pin Assignment

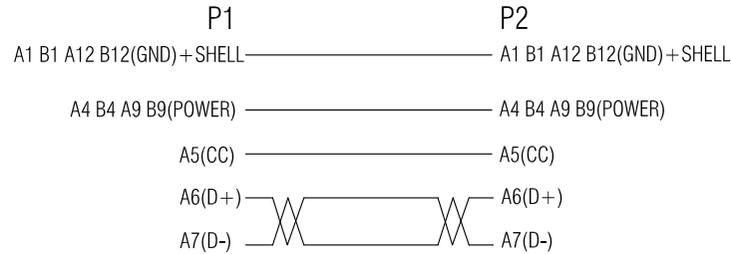

Electrical Test:

1. 100% TEST OPEN SHORT MIS-WIRE.
2. CONTACT RESISTANCE: 3Ω MAX.
3. INSULATION RESISTANCE: 5MΩ MIN.
4. HI-POT: 300V DC/10MS.
5. Support USB 2.0 480Mbps.
6. Support PD 20V/3A 60W MAX.



ROLINE USB 2.0 Silicon cable, C-C, M/M, 1m, PINK

| | | | |
|--------|--|----------|------|
| C | 100A TPE PINK | | G |
| B | TYPE C MALE(Black Insulation, Nickel plated) | 2 | PCS |
| A | NON-UL, 30#*4C+24#*4C, OD=4.5mm, PINK Silicon JACKET . | 1 | PCS |
| NUMBER | PRODUCT SPECIFICATIONS | Quantity | Unit |


| | | |
|----------|-------------|------------------|
| Item | 11.02.9122 | |
| Draw | <i>Kobe</i> | Date: 2024.09.10 |
| Approval | | |
| Duty | F16 | BOM.NO: 14911 |

SECOMP

RoHS Compliant

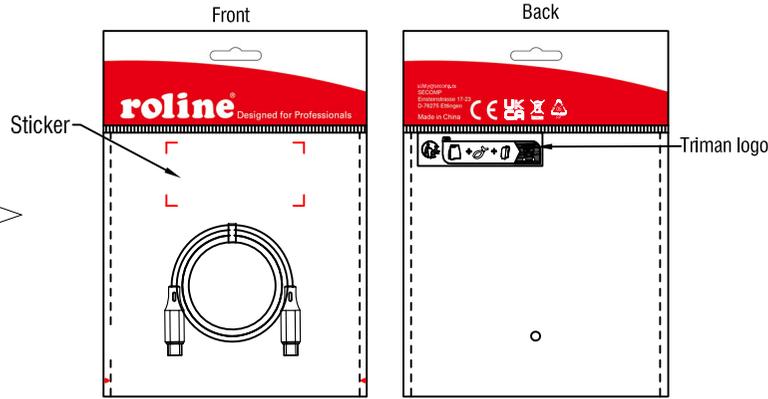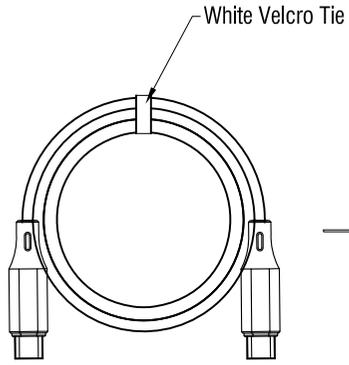


1PCS/RLA BAG-S(0.15*110*205mm)+ Sticker


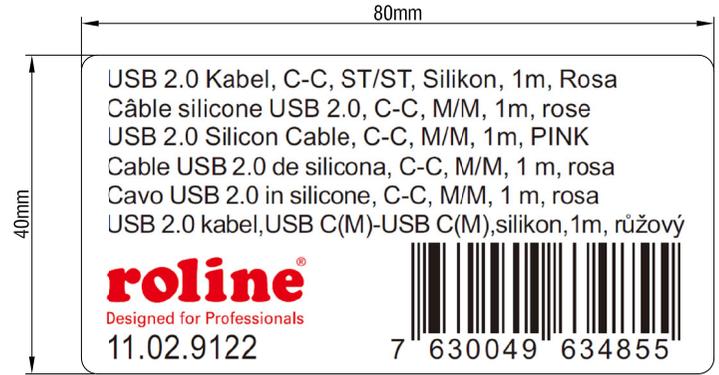


Sticker

Carton Sticker(2cm distance from edge of carton)




Box
(155*82*205mm)
10PCS/CNT

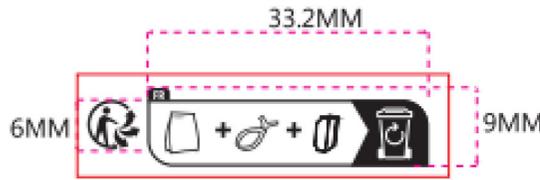

Triman logo



Carton Sticker

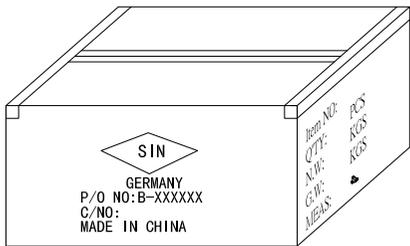

Carton Size:
(440*330*220mm)
100PCS/CTN

| | | | |
|--|-------------|-------------------|--------------------------|
| ROLINE USB 2.0 Silicon cable,C-C,M/M,1m,PINK | | | SECOMP |
| Item | 11.02.9122 | | |
| Draw | <i>Kobe</i> | Date: 2024.09.10 | |
| Approval | | | |
| Duty | F16 | BOM.NO: 14911 | |
| Sample NO. | RLA240724-3 | Drawings of 2 (2) | Proportion: 1:1 Unit(mm) |