



RoHS Compliant

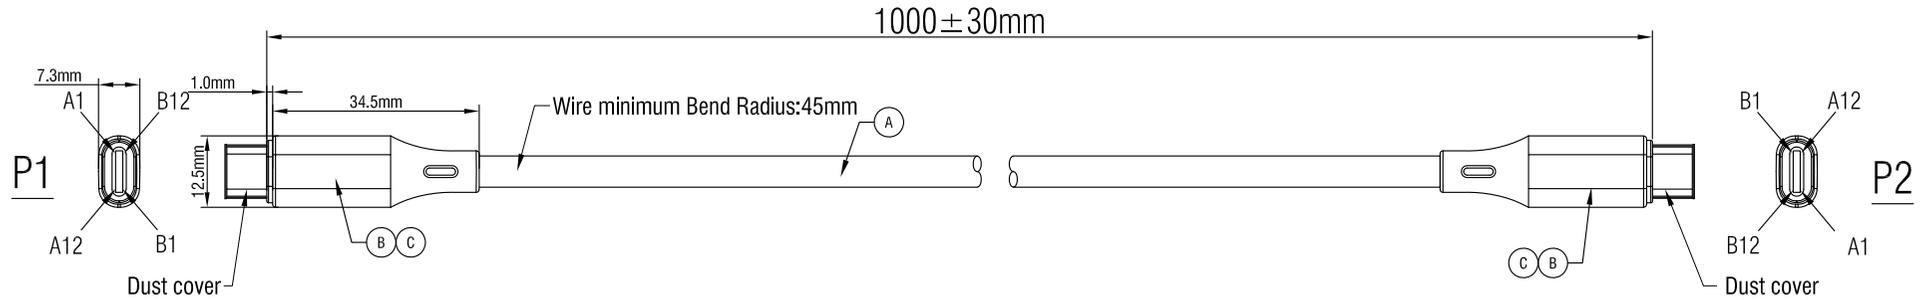

Pin Assignment

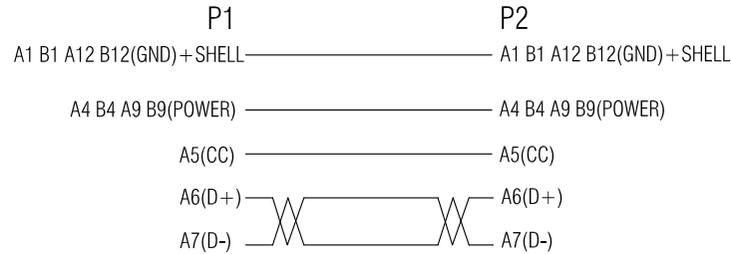

Electrical Test:

1. 100% TEST OPEN SHORT MIS-WIRE.
2. CONTACT RESISTANCE: 3Ω MAX.
3. INSULATION RESISTANCE: 5MΩ MIN.
4. HI-POT: 300V DC/10MS.
5. Support USB 2.0 480Mbps.
6. Support PD 20V/3A 60W MAX.



ROLINE USB 2.0 Silicon cable, C-C, M/M, 1m, BLUE

C	100A TPE BLUE		G
B	TYPE C MALE(Black Insulation, Nickel plated)	2	PCS
A	NON-UL, 30#*4C+24#*4C, OD=4.5mm, BLUE Silicon JACKET .	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

Item	11.02.9123	
Draw	<i>Kobe</i>	Date: 2024.09.10
Approval		
Duty	F16	BOM.NO: 14912

SECOMP

RoHS Compliant

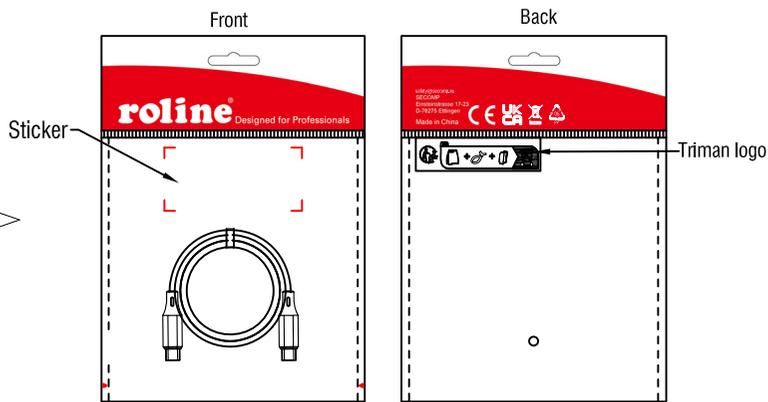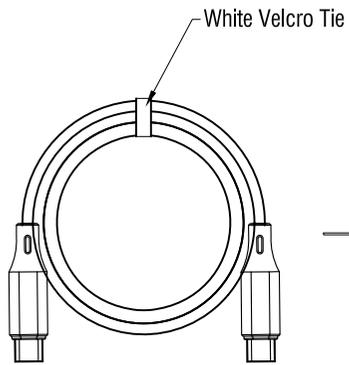


1PCS/RLA BAG-S(0.15*110*205mm)+ Sticker





Sticker

Carton Sticker(2cm distance from edge of carton)




Box
(155*82*205mm)
10PCS/CNT

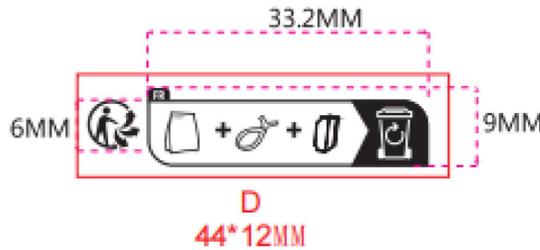

Triman logo



Carton Sticker

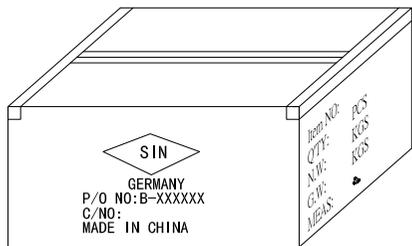

Carton Size:
(440*330*220mm)
100PCS/CTN

ROLINE USB 2.0 Silicon cable,C-C,M/M.1m,BLUE			
Item	11.02.9123		
Draw	<i>Kobe</i>	Date: 2024.09.10	
Approval			
Duty	F16	BOM.NO:14912	
Sample NO.	RLA240724-4	Drawings of 2 (2)	Proportion: 1:1 Unit(mm)