



RoHS Compliant

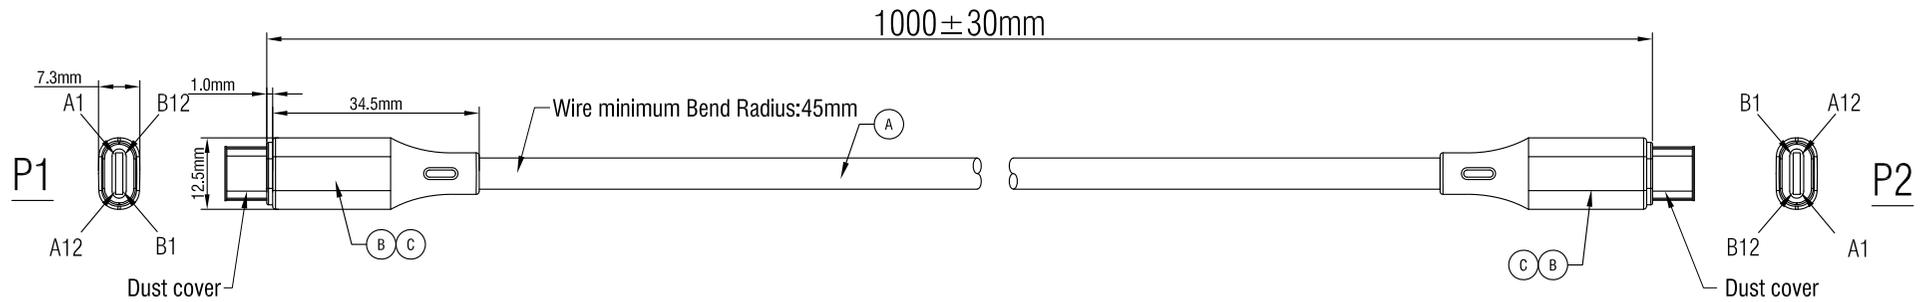

Pin Assignment

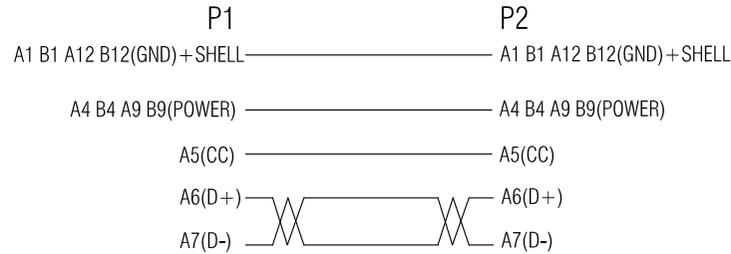

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.
- 5.Support USB 2.0 480Mbps.
- 6.Support PD 20V/3A 60W MAX.



ROLINE USB 2.0 Silicon cable,C-C,M/M.1m,ORANGE

C	100A TPE ORANGE		G
B	TYPE C MALE(Black Insulation,Nickel plated)	2	PCS
A	NON-UL,30#*4C+24#*4C,OD=4.5mm, ORANGE Silicon JACKET .	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

Item	11.02.9124	
Draw	Kobe	Date: 2024.09.10
Approval		
Duty	F16	BOM.NO: 14913

SECOMP

RoHS Compliant

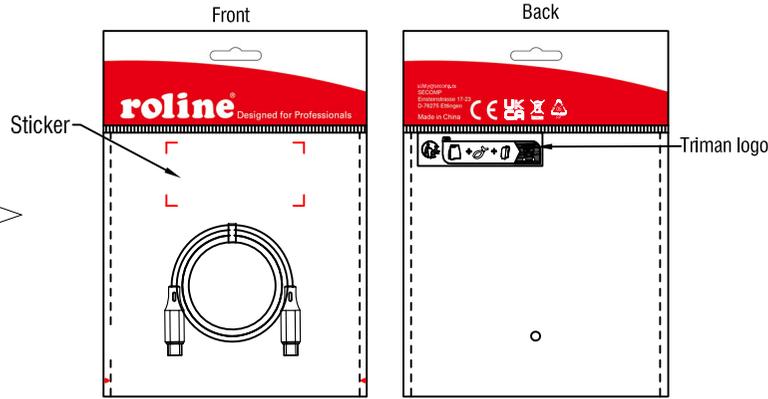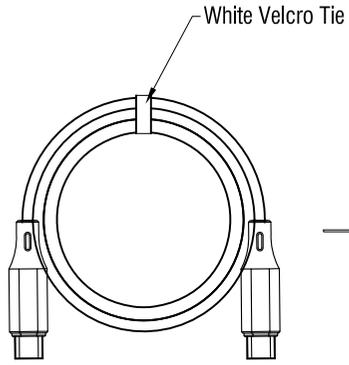


1PCS/RLA BAG-S(0.15*110*205mm)+ Sticker




Sticker


Carton Sticker(2cm distance from edge of carton)




Box
(155*82*205mm)
10PCS/CNT



D
44*12MM
Triman logo

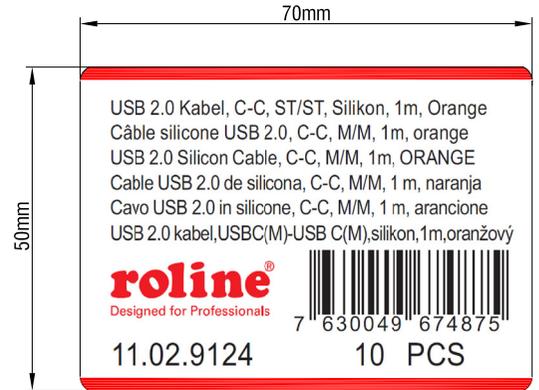

Carton Sticker

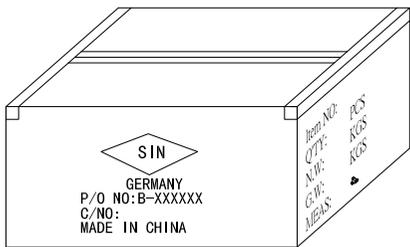

Carton Size:
(440*330*220mm)
100PCS/CTN

ROLINE USB 2.0 Silicon cable,C-C,M/M.1m,ORANGE			SECOMP
Item	11.02.9124		
Draw	<i>Kobe</i>	Date: 2024.09.10	
Approval			
Duty	F16	BOM.NO:14913	
Sample NO.	RLA240724-5	Drawings of 2 (2)	Proportion: 1:1 Unit(mm)