



RoHS Compliant

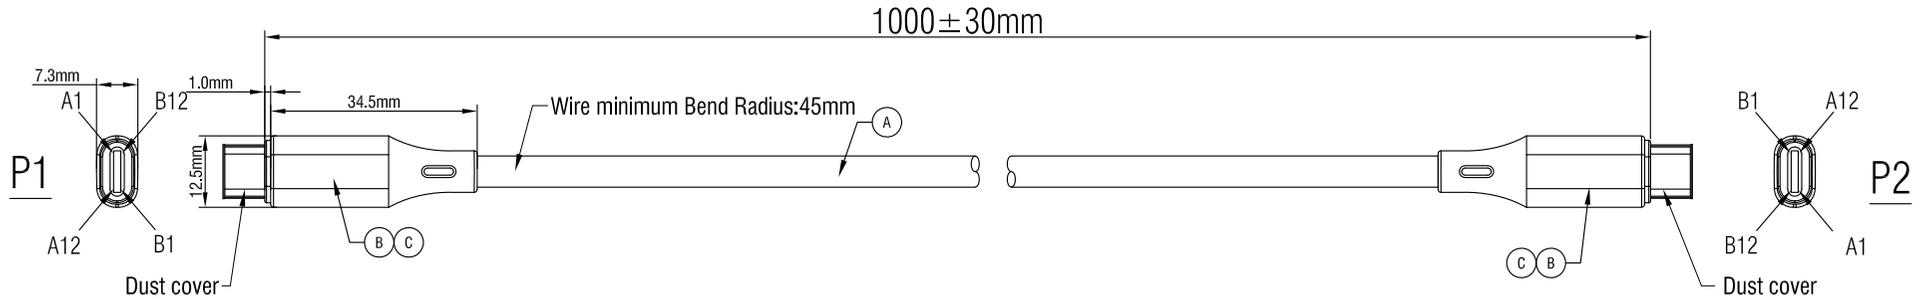

Pin Assignment

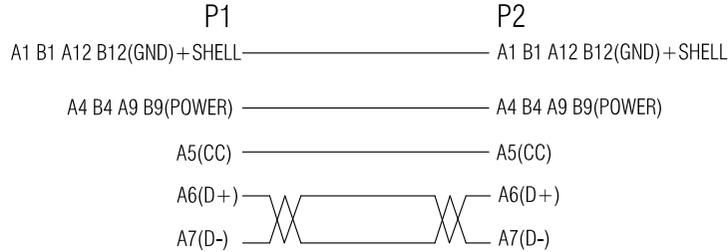

Electrical Test:

1. 100% TEST OPEN SHORT MIS-WIRE.
2. CONTACT RESISTANCE: 3Ω MAX.
3. INSULATION RESISTANCE: 5MΩ MIN.
4. HI-POT: 300V DC/10MS.
5. Support USB 2.0 480Mbps.
6. Support PD 20V/3A 60W MAX.



ROLINE USB 2.0 Silicon cable, C-C, M/M, 1m, GREEN

C	100A TPE GREEN		G
B	TYPE C MALE (Black Insulation, Nickel plated)	2	PCS
A	NON-UL, 30#*4C+24#*4C, OD=4.5mm, GREEN Silicon JACKET.	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

Item	11.02.9125	
Draw	<i>Kobe</i>	Date: 2024.09.10
Approval		
Duty	F16	BOM.NO: 14914

**SECOMP**

RoHS Compliant

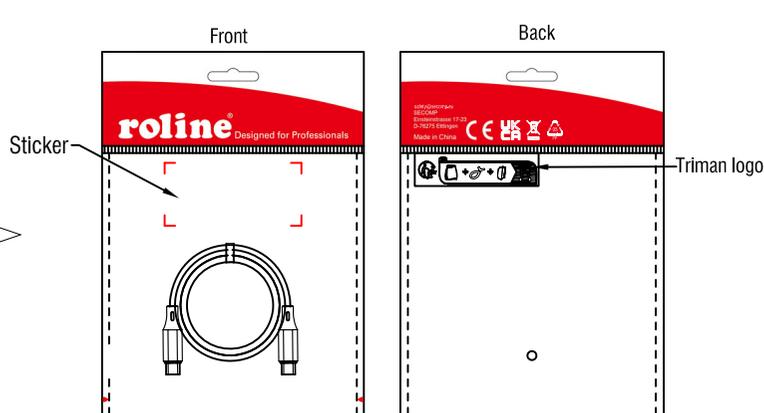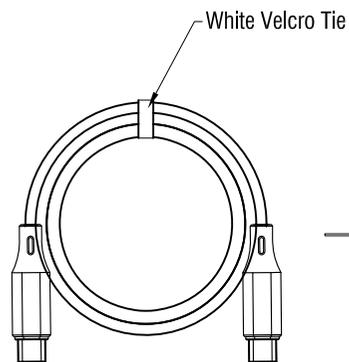


1PCS/RLA BAG-S(0.15\*110\*205mm) + Sticker




Sticker


Carton Sticker(2cm distance from edge of carton)




Box  
(155\*82\*205mm)  
10PCS/CNT

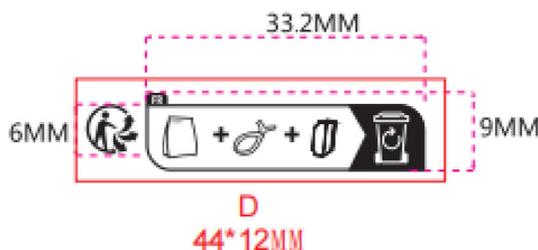

Triman logo

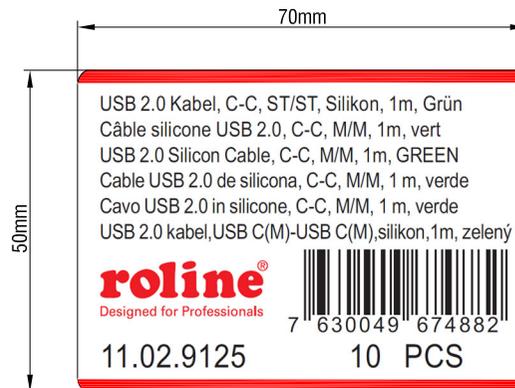

Carton Sticker

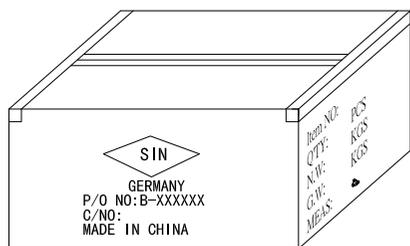

Carton Size:  
(440\*330\*220mm)  
100PCS/CTN

D		
C		
B		
VER.A	REVISE	DATE
<b>Company: RLA</b>		<b>REALLYUSEFUL ELECTRONICS INC.</b>
Item	11.02.9125	
Draw	<i>Kobe</i> Date: 2024.09.10	
Approval		
Duty	F16 BOM.NO:14914	
Sample NO.	RLA240724-6	Drawings of 2 (2)   Proportion: 1:1   Unit(mm)   A4