


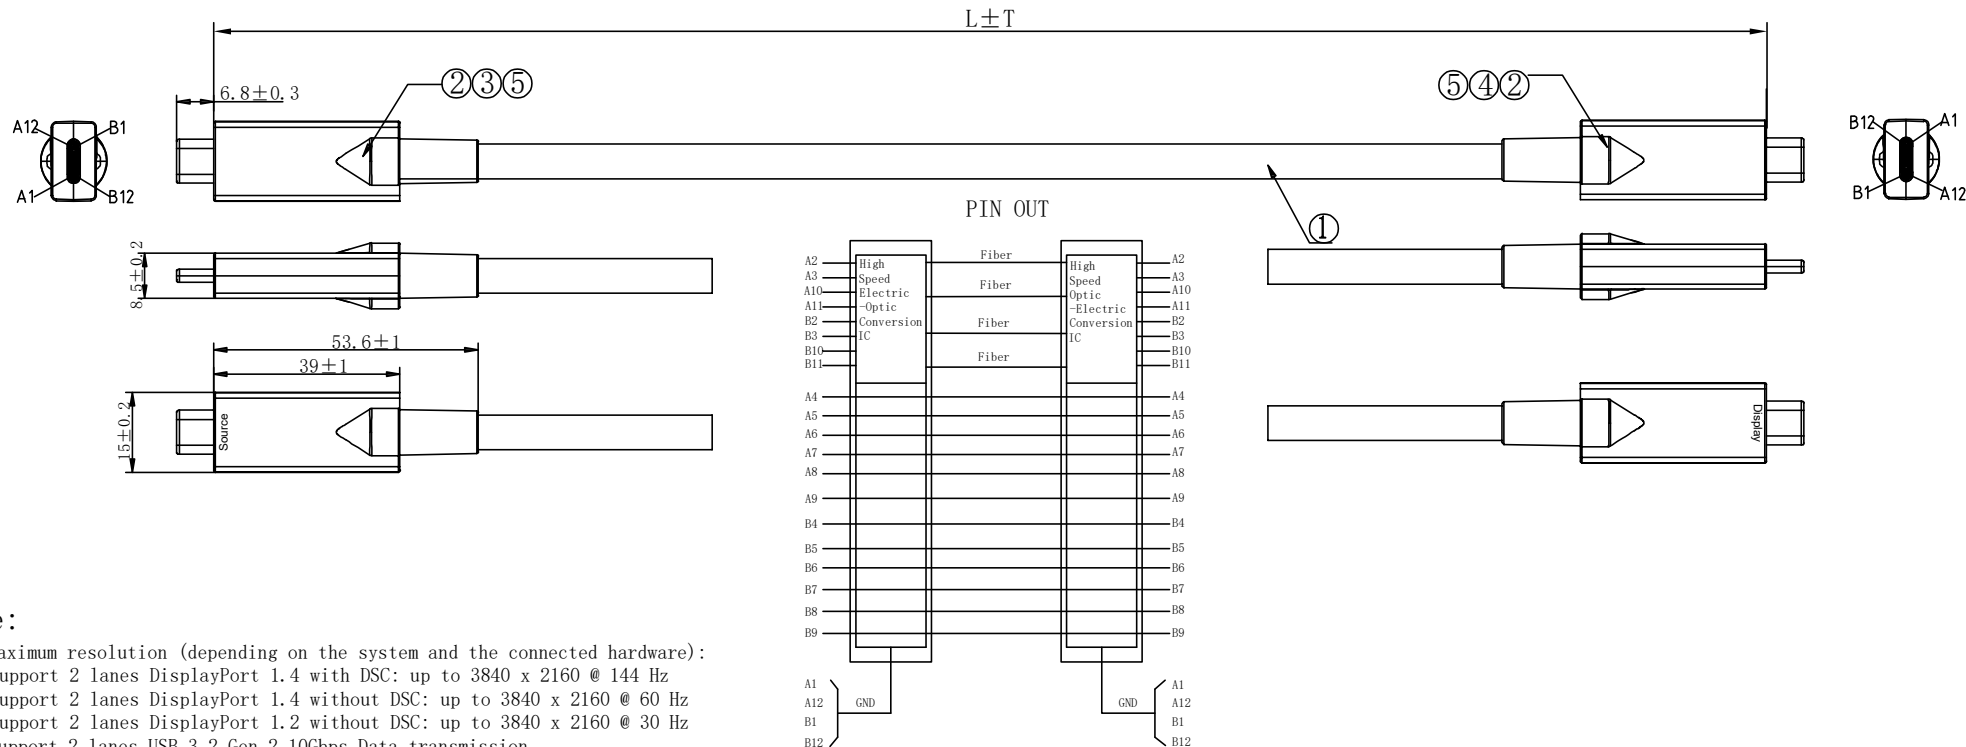

Note:

- Maximum resolution (depending on the system and the connected hardware):
Support 2 lanes DisplayPort 1.4 with DSC: up to 3840 x 2160 @ 144 Hz
Support 2 lanes DisplayPort 1.4 without DSC: up to 3840 x 2160 @ 60 Hz
Support 2 lanes DisplayPort 1.2 without DSC: up to 3840 x 2160 @ 30 Hz
- Support 2 lanes USB 3.2 Gen 2 10Gbps Data transmission
- Backwards USB 2.0
- Support PD 60W (20V 3A) Power Delivery
- Packing: lpc/box

MATERIAL LIST:

⑤	Housing	Zinc Alloy housing Black	2	
④	PCBA 2	USB Type C PCBA (Device)	1	
③	PCBA 1	USB Type C PCBA (Host)	1	
②	TYPE C	USB3.2 C/M ,Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating	2	
①	Cable	4C Fiber+(1P*24AWG+D+AL+ML)*1+1P*30AWG+2C*20AWG+2C*28AWG+F+AL+2D+B PVC Black OD 6.3±0.2mm	L±T	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2024-11-14	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

Item No.	DESC.
11. 02. 9132	ROLINE USB3.2 Gen2 C-C, M/M AOC Cable, 4K/60Hz, PD 60W black, 15m
11. 02. 9131	ROLINE USB3.2 Gen2 C-C, M/M AOC Cable, 4K/60Hz, PD 60W black, 10m

SECOMP