


WIRE ADDRESS

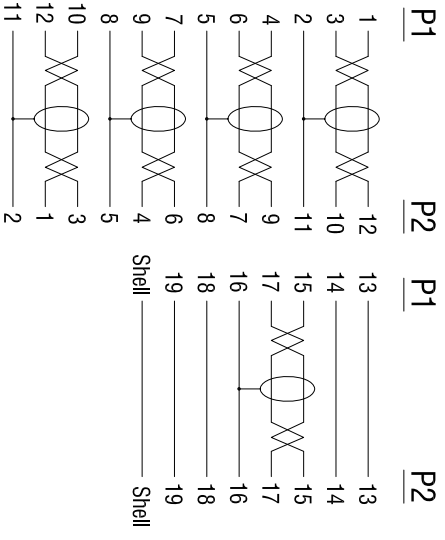

ITEM NO	L(mm)	T(mm)
11.04.5601	1000	+30/-0mm
11.04.5602	2000	+50/-0mm
11.04.5603	3000	+50/-0mm

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 3840*2160P 60HZ.
 - 6.Real Test Not Twinkling, Double Vision and Decolor.

NUMBER	1	2	4	Quantity	Unit	Duty	F16	BOM.NO:
D	45P BLACK PVC			6	PCS			
C	DisplayPort 20P MALE BLACK ABS SHELL			6	PCS	Item	11.04.5601~11.04.5603	
B	DisplayPort 20P MALE(Black Insulator, Nickel Plated)			2	PCS	Draw	<i>Yoko</i>	Date: 2020.01.6
A	UL20276 [30AWG*1P(BC) + D + AM1*5 + 30AWG*5C(BC) + AEB(AM), OD=7.3mm, BLACK PVC JACKET.			1	PCS	Approval		
PRODUCT SPECIFICATIONS								
Sample NO.								
Drawings of 1 (1) Proportion: 1:1 Unit(mm) A4								



ROLINE DisplayPort Cable, DP M - DP M