

Note:

ROHS 2.0 & REACH Compliant



2. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2

3. Min. Bending Radius: Static: 30mm, Dynamic: 60mm

Test:

Grade Designation: Each to Reference

TYPE	MULTI-MODE
Insertion LOSS	≤0.3dB
Return LOSS	≥30dB
Test Wavelength	850nm

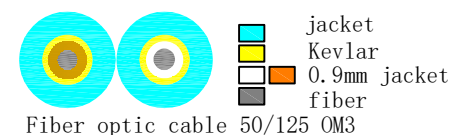

⑧	Ring 1 2 Yellow	4pcs	
⑦	Black Heat Shrink Tube	2pcs	
⑥	LC MM Aqua Clip	2pcs	
⑤	LC Dust Cap White	4pcs	
④	LC Aqua Duplex Connector	4pcs	
③	LC White Boot	4pcs	
②	LC Ferrule 126-128um	4pcs	
①	Fiber Optical Cable Duplex Ø3.0mm OM3 50/125um Aqua LSZH	L+0.1m	
NO.	SPECIFICATION STANDARD	QT' Y	REMARK

Gao	Arvin	CHANGE THE ITEM NO. ⚠	2025-12-09	A1
		NEW	2016-05-13	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

11. 55. 1805	STANDARD FO Cable 50/125μm, OM3, LC/LC, turquoise, 5m
11. 55. 1803	STANDARD FO Cable 50/125μm, OM3, LC/LC, turquoise, 3m
11. 55. 1802	STANDARD FO Cable 50/125μm, OM3, LC/LC, turquoise, 2m
11. 55. 1801	STANDARD FO Cable 50/125μm, OM3, LC/LC, turquoise, 1m
ITEM NO.	Product description

SECOMP