


| REV | Description |
|-----|-------------|
| 2   |             |

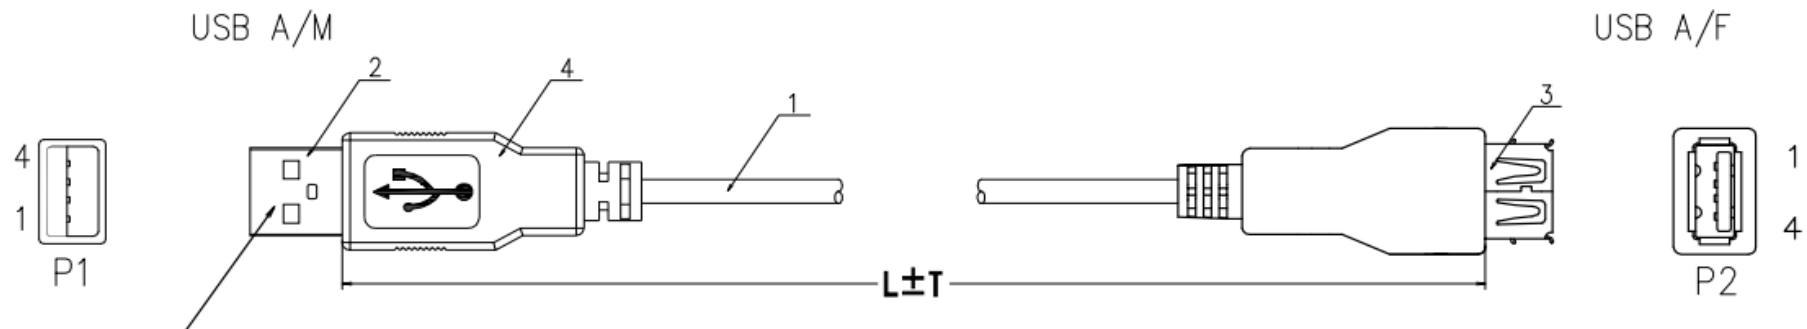

| Item No.     | Length         |
|--------------|----------------|
| 11. 55. 3111 | L=0. 8m ± 15mm |
| 11. 55. 3112 | L=1. 8m ± 15mm |
| 11. 55. 3113 | L=3m ± 20mm    |

#### NOTE:

1 100% open short and miss wire test

2.Insulation resistance: DC300V/5s 10Mohm min


3.Dielectric strength: 150V AC/minute, 1mA

|          |           |                                                |     |         |
|----------|-----------|------------------------------------------------|-----|---------|
|          | COON-P2   | USB A/F                                        | 3   | NICKEL  |
|          | COON-P1   | USB A/M                                        | 2   | NICKEL  |
|          | MOLDING   | PVC                                            | 2   | beige   |
|          | CABLE     | USB2.0 28AWG*2C CU+28AWG*1P CU+ALFoil+D<br>OD4 | 1   | beige   |
| PART NO. | PART NAME | MATERIAL                                       | QTY | REMARKS |

#### PINOUT

| USB A/M | USB A/F  |
|---------|----------|
| P1      | P2       |
| 1 - - - | 1 RED    |
| 2 X X   | 2 WHITE  |
| 3 X X   | 3 YELLOW |
| 4 - - - | 4 BLACK  |
| G - - - | G GROUND |

#### CABLE STRUCTURE

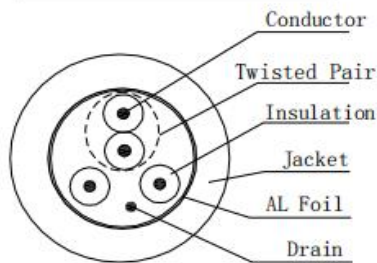

|         |  |                                          |     |            |    |       |     |
|---------|--|------------------------------------------|-----|------------|----|-------|-----|
| PRODUCT |  | STANDARD USB2.0 Cable Type A, M/F, beige |     |            |    |       |     |
| DRAW    |  | CONSUMER                                 |     |            |    |       |     |
| CHECK   |  | DATE                                     |     | 2025/12/18 |    | REV.  | A/1 |
| APP     |  | SHEET                                    | 1/1 | UNIT       | mm | SCALE |     |
|         |  |                                          |     |            |    |       |     |