


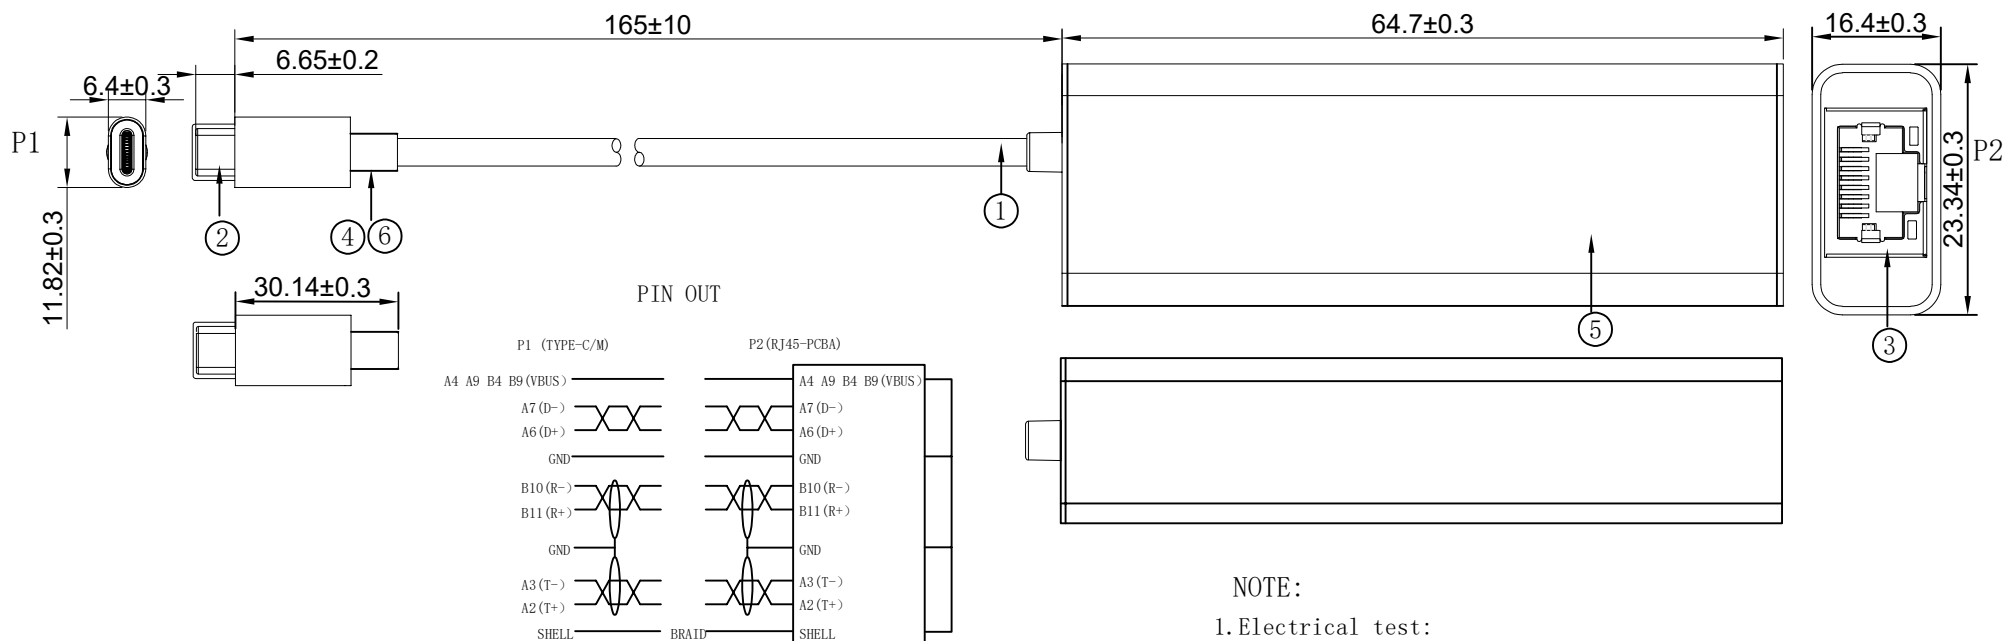

NOTE:

1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC 300V
- (3). Contactor resistance: 5ohm Max;
2. Gigabit Ethernet 10/100/1000/2500/5000Mbps
3. Operating Temperature: $0^{\circ}\text{C} \sim 45^{\circ}\text{C}$
Storage Temperature: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
4. RoHS and REACH Compliant

MATERIAL LIST:

⑥	DUST CAP	LDPE	1	
⑤	HOUSING	ALUMINUM HOUSING GREY	1	
④	TBUE END	BLACK PVC 45P	1	
③	RJ45	BLACK INSULATION, THE PIN GOLD PLATING, THE SHELL FOR GOLD PLATING	1	
②	USB C TYPE	BLACK INSULATION, THE PIN GOLD PLATING, THE SHELL FOR GOLD PLATING	1	
①	CABLE	USB3. 0 (1P*32#+D+AL+ML)*2+1P*32#+2C*24#+ADB 32# OD: 4.5 ± 0.2 MM BLACK PVC JACKET	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK
		NEW	2024-11-28	A0
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

Item no	
12. 02. 1113	
DESC.	ROLINE USB C - Ethernet Adapter, USB3. 2 Gen2, 5G, USB C-RJ45, space grey

SECOMP