

USB-C to 4K HDMI Converter (2.7M)


UC3238

- UC3238 is a seamless, single cable solution for connecting from USB-C laptop to an HDMI display, allowing for tidy installation and cable management without the needs for additional dongles or HDMI extension cables.

It supports HDMI 2.0 with a 4K (3840 x 2160 @ 60 Hz) resolution. Users can transmit high-definition video and audio from computer to an HDTV for video streaming or gaming. In addition, you can connect and configure your monitor for a mirrored display or an extended desktop view.

Moreover, UC3238 does not require external drivers or additional power. It works with USB-C port computers and smartphones with DP Alt mode, compatible with Android, Mac OS X and Windows operating systems, and is convenient to use and carry around.

It has a fully reversible USB-C interface with 2.7 meters long-distance connectivity that is capable of providing maximum conductivity and improving signal transmission.




Features

- Connect a USB-C enabled laptop or Smartphone which utilizes "DP Alt Mode" functionality to an HDMI compatible display using a single cable*
- Supports resolutions up to 4K@60Hz (3840 x 2160 @ 60 Hz)
- Supports a long-distance connectivity of up to 2.7 meters
- No additional dongles and HDMI extension cables needed
- Plug and play – no drivers or external power adapter needed
- Works with all major operating systems: Windows®, OS X® and Android**

* With Intel 7th-Generation Core Processor (Kaby Lake) and above. For video output to work through a USB-C port, it must support DP Alt Mode.

** Support Android mirror mode only.

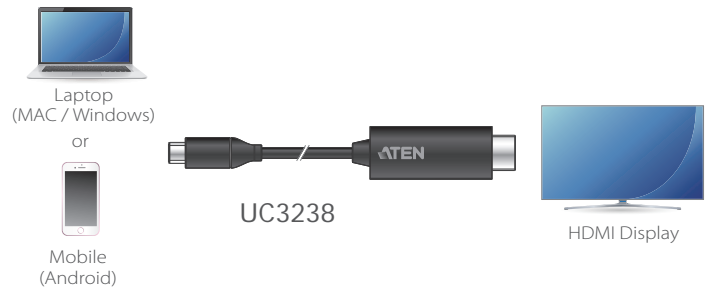

Specifications

| Function | UC3238 |
|-----------------------------|--|
| Computer Connections | 1 |
| Connectors | |
| USB Port | 1 x USB-C Male |
| Video Output | 1 x HDMI Type-A Male |
| Video | |
| Max. Pixel Clock | 594MHz |
| Max. Resolution | 3840 x 2160 @ 60Hz |
| Compliance | USB3.1 Type-C with DP Alt Mode (Thunderbolt™ 3 Compatible), USB Billboard Device Class, HDCP 2.2, HDMI 2.0 |
| Audio | |
| Output | 1 x HDMI Type-A Male |
| Environmental | |
| Operating Temperature | 0° - 40° C |
| Storage Temperature | -20° - 60° C |
| Humidity | 0 - 80% RH, Non-condensing |
| Physical Properties | |
| Housing | Plastic |
| Weight | 0.16 kg |
| Dimensions (L x W x H) | 6.40 x 2.10 x 1.10 cm |

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 01/2019 V1.0



© Copyright 2019 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.