



## 4-Port True 4K HDMI Splitter

VS4814

Brilliant True 4K, Effortlessly Multiplied  
across Four Streams




The VS4814 distributes a single HDMI source to four displays simultaneously, delivering stunning True 4K visuals. It features EDID Sync™ for flawless audiovisual synchronization and HDCP 2.2 compliance to guarantee reliable visual performance. Supporting HDR10+, 3D formats, and Deep Color, it offers richer contrast and a wider color spectrum for truly immersive viewing. Its sleek, compact, and user-friendly design makes it ideal for modern digital signage, commercial display applications, and home entertainment setups.



Accent Light



Compact Design



18Gbps Max. Bandwidth

## Features

### EDID Sync™ Smart Display Optimization

Automatically optimizes resolutions and prevents display issues for flawless display presentation

### True 4K Quad-Display Sharing

Shares one HDMI source across four True 4K displays for maximum visual impact with uncompromised quality

### HDMI 3D/Deep Color, HDR10+, HDCP 2.2 Compatible

Guarantees stable performance, broad compatibility, and superior image quality


### Master-Class Audio Immersion

Full support for LPCM 7.1, Dolby® Digital & DTS-HD Master Audio™ delivers theatrical-quality surround sound

### Aesthetic Compact Form

Slim profile and stylish accent lighting allow integration into any space, perfectly complementing your setting


## Installation

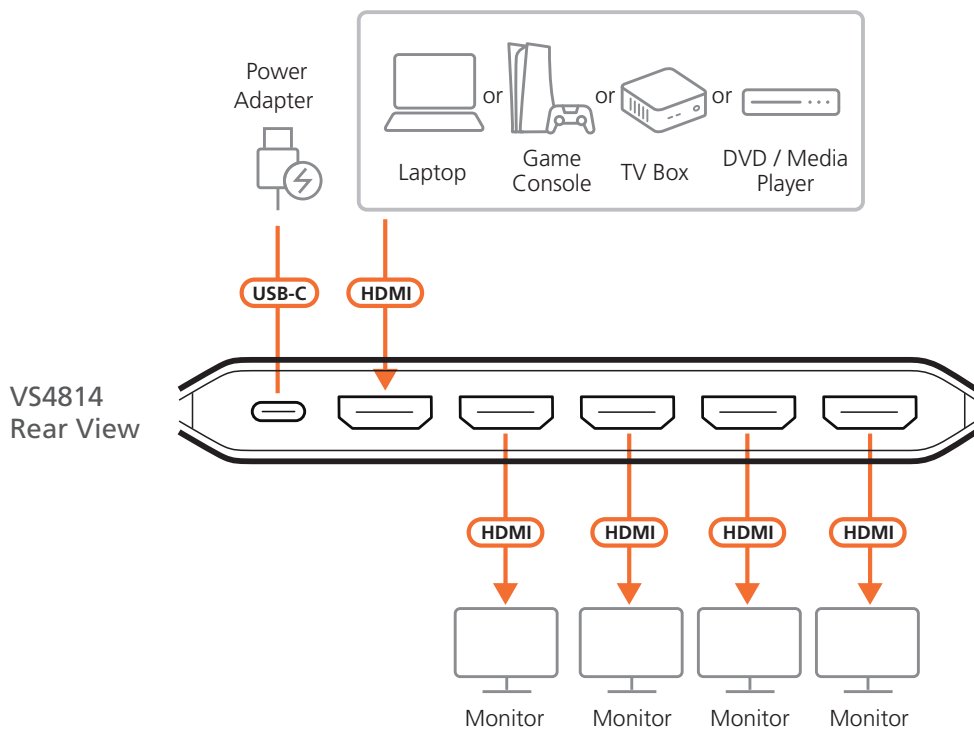

## Specifications

<b>Video Input</b>	
Interfaces	1 x HDMI Type-A Female (Black)
Impedance	100 Ω
Max. Distance	3 m at 3840 x 2160 @ 60Hz (4:4:4)
<b>Video Output</b>	
Interfaces	4 x HDMI Type-A Female (Black)
Impedance	100 Ω
Max. Distance	3 m at 3840 x 2160 @ 60Hz (4:4:4)
<b>Video</b>	
Max. Data Rate	18 Gbps (6 Gbps per lane)
Max. Pixel Clock	600 MHz
Compliance	HDMI (3D, Deep Color, 4K) HDCP 2.2 Compatible
Max. Resolution	3840 x 2160 @ 60Hz (4:4:4)
<b>Audio</b>	
Input	1 x HDMI Type-A Female (Black)
Output	4 x HDMI Type-A Female (Black)
<b>Connectors</b>	
Power	1 x USB-C (5V/1A)
<b>Cable Length</b>	
USB Cable	1 x USB Type-C to Type-A (1 m)
<b>LEDs</b>	
LED Indicator	4 x Port Indicator (Orange)
Power	2 (Orange, Bottom Side)
<b>Environmental</b>	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 – 80% RH, Non-Condensing
<b>Physical Properties</b>	
Housing	Plastic
Weight	0.10 kg
Dimensions (L x W x H)	14.50 x 5.65 x 1.52 cm
<b>Carton Lot</b>	20 pcs

## Package Contents

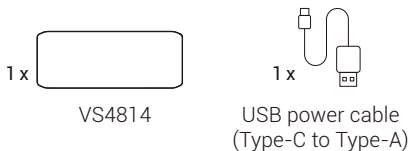

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District,  
New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 | Fax: 886-2-8692-6767  
www.aten.com | E-mail: marketing@aten.com

Released: 01/2026 V2.0

© Copyright 2026 ATEN® International Co. Ltd. ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners. Product information is subject to change without prior notice. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.