

1

2





3

4



5

6

Total length (optional)

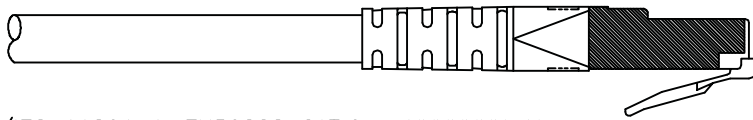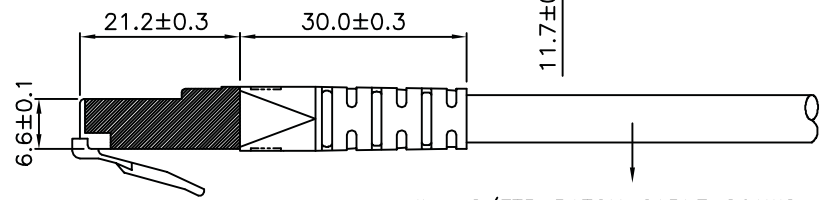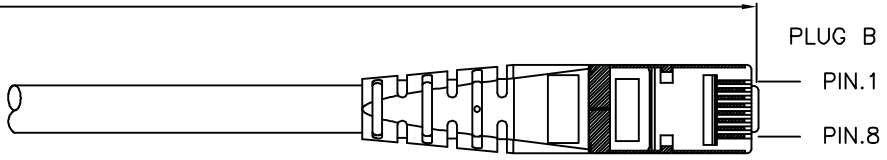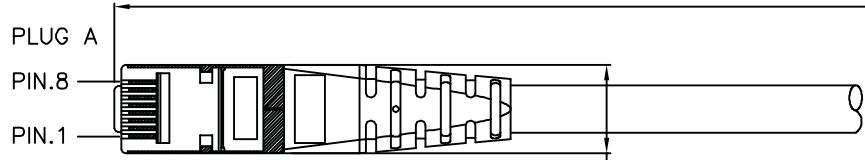

roline S/FTP PATCH CABLE 26AWG 4PR ISO/IEC 11801 & EN50288 CAT.6 XXXXXXXX-X

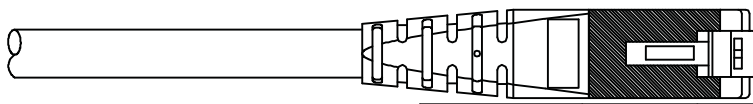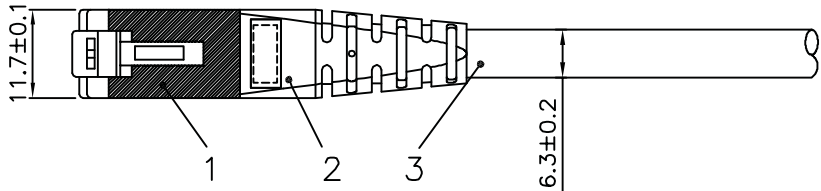

- (1) Jacket Color : Blue RAL5015
- (2) Wiring:T568B

item no.	length	tolerance
21.15.1314	0.3M	+20 -0
21.15.1324	0.5M	+20 -0
21.15.1334	1M	+20 -0
21.15.0827	1.5M	+20 -0
21.15.1344	2M	+20 -10
21.15.1354	3M	+20 -10
21.15.1364	5M	+30 -20
21.15.1374	7M	+30 -20
21.15.1384	10M	+30 -20
21.15.1394	15M	+30 -20
21.15.1404	20M	+70 -30

Specification :

Material :

- RJ45 Plug :
 - Housing : Polycarbonate,Transparent color.
 - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
 - Shield : Bronze with Nickel plated.
- Molding : PVC.
- Cable :
 - Jacket : PVC.
 - Conductor : 26 AWG stranded copper.
 - Isolation : PE.
 - Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
- Cable structure : S/FTP, 4 twisted pair.
- Minimum Bending Radius: 50mm

item no	21.15.1314	21.15.1324	21.15.1334	21.15.0827	21.15.1344
21.15.1354	21.15.1364	21.15.1374	21.15.1384	21.15.1394	21.15.1404

Desc ROLINE Cat 6 S/FTP Patch Cord,Blue

"#": Matching DIM.	DRAWING	23.JuL.2016	byz
"*": Important DIM.	CHECK	23.JuL.2016	Jane
Others General DIM.	APPROVAL	23.JuL.2016	Jaimy
GENERAL TOLERANCE OF DIMENSIONS	DATE	NAME	
X.XXX ±0.005	SCALE	1/1 (A4)	UNIT mm
X.XX ±0.05	DRAWING NO.		
X.X ±0.1	DRAWING CLASSIFICATION		

SECOMP

S	SHEET	1 OF 1	A1
---	-------	--------	----

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER