


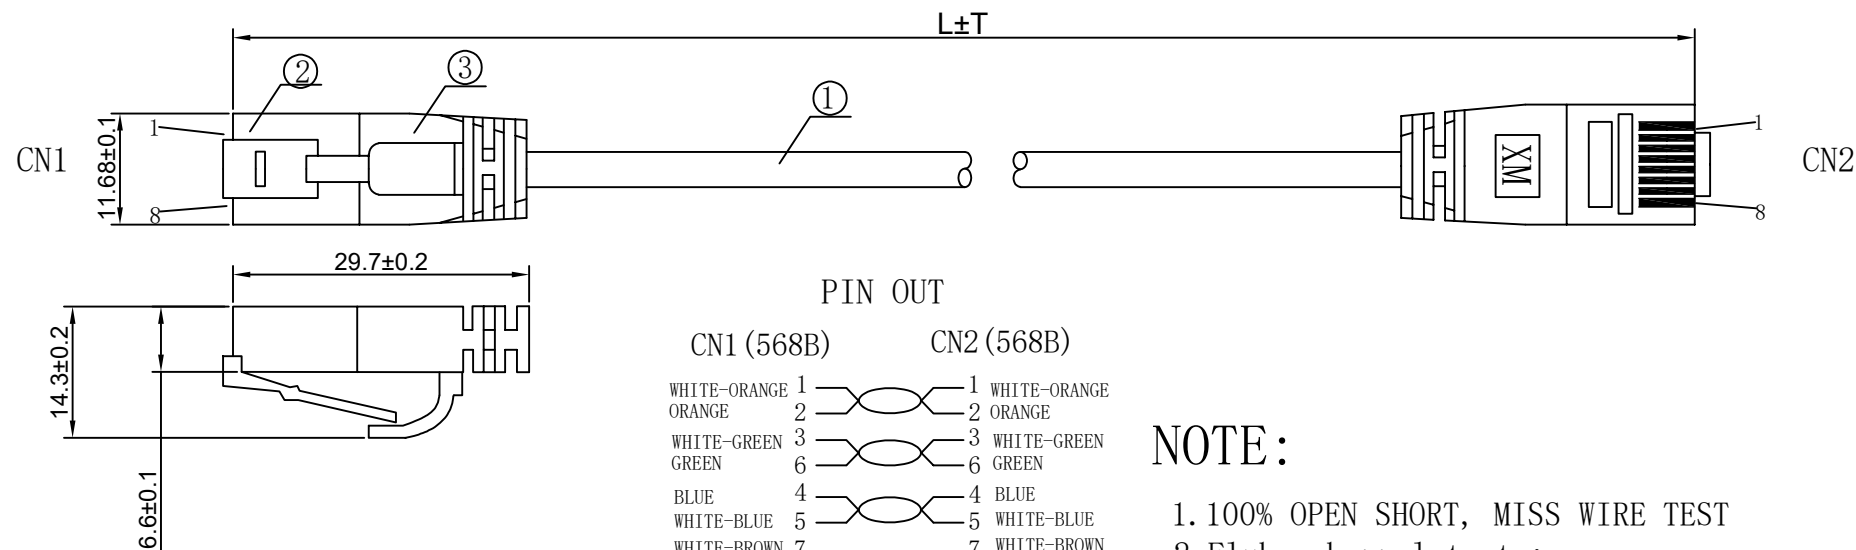


PIN OUT

CN1 (568B)		CN2 (568B)
WHITE-ORANGE	1	1 WHITE-ORANGE
ORANGE	2	2 ORANGE
WHITE-GREEN	3	3 WHITE-GREEN
GREEN	6	6 GREEN
BLUE	4	4 BLUE
WHITE-BLUE	5	5 WHITE-BLUE
WHITE-BROWN	7	7 WHITE-BROWN
BROWN	8	8 BROWN
SHELL	DRAIN	SHELL

NOTE:

- 100% OPEN SHORT, MISS WIRE TEST
- Fluke channel test :
TEST LIMIT:ISO11801 Channel Class I(+ALL)
- PRINTING:Cat8.1 U/FTP 4x2x32AWG/7 TPE-LSZH
ISO/IEC11801 & EN50173 & ANSI/TIA568.2-D
- RoHS2.0 AND REACH COMPLIANT
- Flame retardant (IEC60332-1-2)
Low smoke(IEC 61034)
Halogen free(IEC 60754-2)
- Operating Temperature:-20 ~+75° C
- Minimum of the bending radius is 4*OD
(Suitable for all meters)

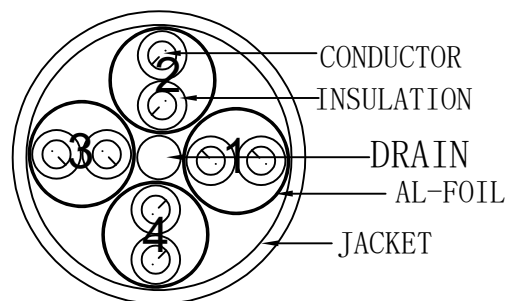

③	OVER MOLD	75A PVC	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 3U", The Shell plated nickel, Black	2	
①	CABLE	U/FTP CAT.8 (AWG32 BC*1P+AL-FOIL)*4PAIRS+ DRAIN+ JACKET:TPE-LSZH yellow(Pantone 135C), OD:3.8±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW	2025-5-29	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

21.15.3236	ROLINE U/FTP PatchCord Cat.8.1,LSOH,slim,yellow	3000±50mm
21.15.3235	ROLINE U/FTP PatchCord Cat.8.1,LSOH,slim,yellow	2000±30mm
21.15.3234	ROLINE U/FTP PatchCord Cat.8.1,LSOH,slim,yellow	1500±30mm
21.15.3233	ROLINE U/FTP PatchCord Cat.8.1,LSOH,slim,yellow	1000±20mm
21.15.3232	ROLINE U/FTP PatchCord Cat.8.1,LSOH,slim,yellow	500±15mm
21.15.3231	ROLINE U/FTP PatchCord Cat.8.1,LSOH,slim,yellow	300±10mm
21.15.3230	ROLINE U/FTP PatchCord Cat.8.1,LSOH,slim,yellow	150±10mm
DESC.	DESC.	LENGTH

SECOMP