


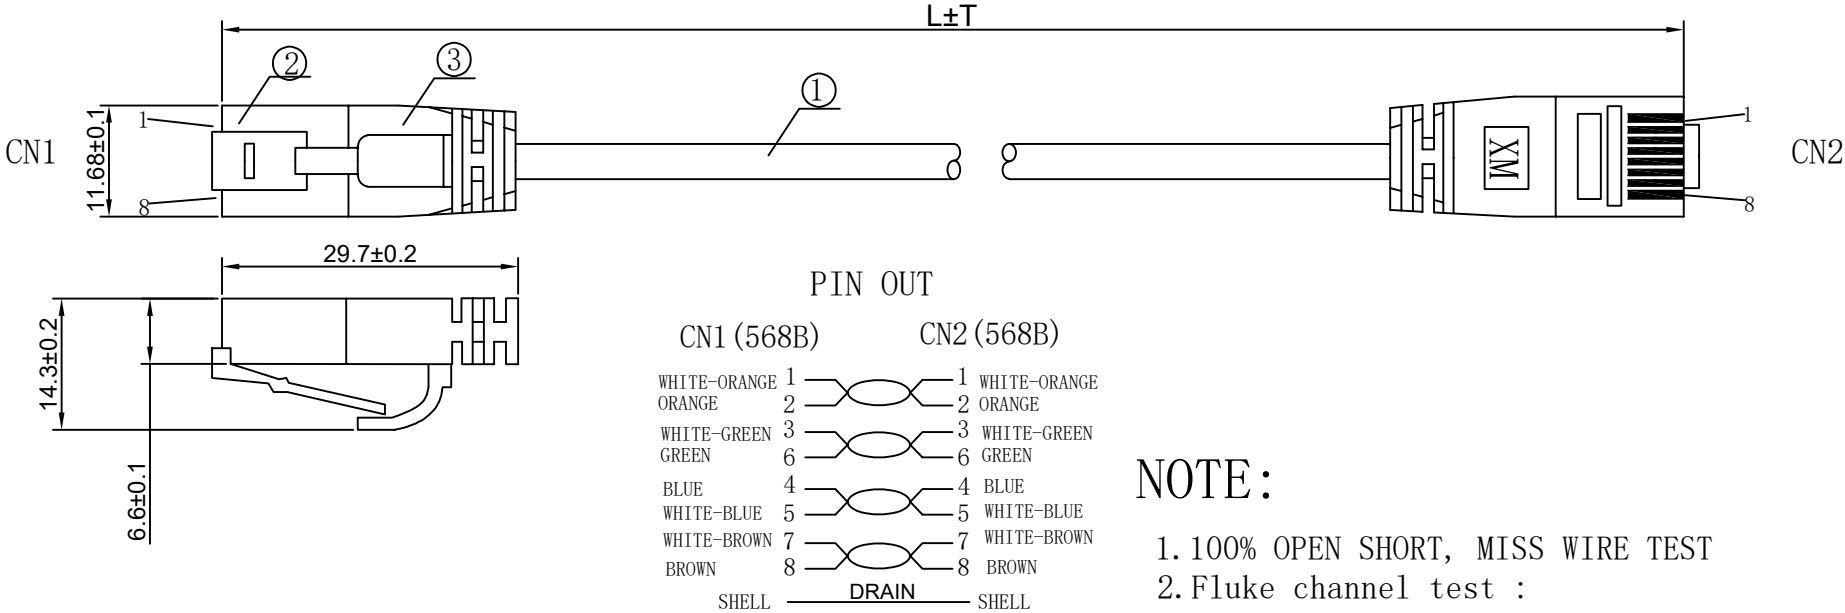

NOTE:

- 1. 100% OPEN SHORT, MISS WIRE TEST
- 2. Fluke channel test :
TEST LIMIT:ISO11801 Channel Class I(+ALL)
- 3. PRINTING:Cat8.1 U/FTP 4x2x32AWG/7 TPE-LSZH
ISO/IEC11801 & EN50173 & ANSI/TIA568.2-D
- 4. RoHS2.0 AND REACH COMPLIANT
- 5. Flame retardant (IEC60332-1-2)
Low smoke(IEC 61034)
Halogen free(IEC 60754-2)
- 6. Operating Temperature:-20 ~+75° C
- 7. Minimum of the bending radius is 4*OD
(Suitable for all meters)

③	OVER MOLD	75A PVC	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 3U", The Shell plated nickel , Black	2	
①	CABLE	U/FTP CAT.8 (AWG32 BC*1P+AL-FOIL)*4PAIRS+ DRAIN+ JACKET:TPE-LSZH green(Pantone 3278C), OD:3.8±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW	2025-5-29	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

21.15.3246	ROLINE U/FTP PatchCord Cat.8.1, LSOH, slim, green	3000±50mm
21.15.3245	ROLINE U/FTP PatchCord Cat.8.1, LSOH, slim, green	2000±30mm
21.15.3244	ROLINE U/FTP PatchCord Cat.8.1, LSOH, slim, green	1500±30mm
21.15.3243	ROLINE U/FTP PatchCord Cat.8.1, LSOH, slim, green	1000±20mm
21.15.3242	ROLINE U/FTP PatchCord Cat.8.1, LSOH, slim, green	500±15mm
21.15.3241	ROLINE U/FTP PatchCord Cat.8.1, LSOH, slim, green	300±10mm
21.15.3240	ROLINE U/FTP PatchCord Cat.8.1, LSOH, slim, green	150±10mm
DESC.	DESC.	LENGTH

SECOMP