


NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke test
- TEST LIMIT:ISO11801 Channel Class I(+ALL)
3. RoHS and REACH Compliant
5. Working temperature: -10°C~+60°C
Storage temperature: -20°C~+75°C
6. Print word: Cat 8.1 S/FTP 4x2x28AWG/7 TPE-LSZH
ISO/IEC11801 & EN50173 & ANSI/TIA568.2-D
7. Flame retardant (IEC60332-1-2)
Low smoke(IEC 61034)
Halogen free(IEC 60754-2)
8. Minimum of the bending radius is 6*ODmm(Suitable for all meters)
9. Support PoE per IEEE802.3af, PoE+ per IEEE802.3at, PoE++ per IEEE802.3bt

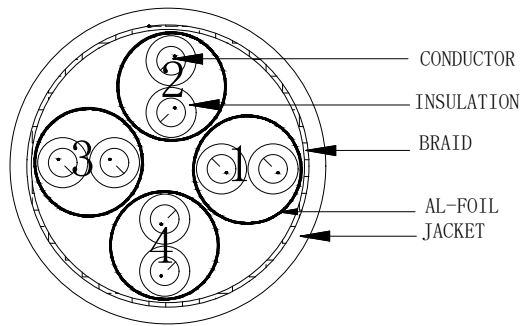

MATERIAL LIST

③	OVER MOLD	75A PVC white(RAL9003)	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 3U", The Shell plated nickel, black	2	
①	CABLE	S/FTP CAT. 8 (AWG28 BC*1P+AL-FOIL)*4PAIRS+ BRAID+ JACKET:TPE-LSZH white(RAL9003) OD:4.5±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

21.15.3465	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, white	5000±100mm
21.15.3463	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, white	3000±50mm
21.15.3462	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, white	2000±30mm
21.15.3464	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, white	1500±30mm
21.15.3461	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, white	1000±25mm
21.15.3460	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, white	500±25mm
21.15.3466	ROLINE PatchCord S/FTP Cat.8.1, Slim, PoE, white	300±25mm
ITEM NO.	DESC.	LENGTH



NEW

2025-03-31

A