



NOTE:

Insertion Loss (typical) (dB)	≤0.12
Insertion Loos (dB)	≤0.20
Operating Temperature (°C)	-40 ~ +80
Storage Temperature (°C)	-40 ~ +85

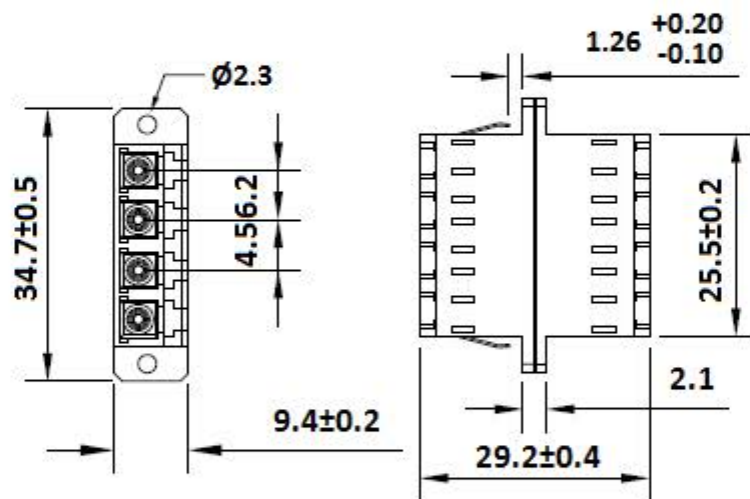

MATERIAL LIST:

⑥	LC Body Quad Lime Green (SC Duplex footprint)	1pcs	
⑤	LC Sleeve ceramic (Multi-Mode)	4pcs	
④	Bush Lime Green	4pcs	
③	LC Body Quad Lime Green (SC Duplex footprint)	1pcs	
②	Metal Mount	1pcs	
①	LC White Dustcap	8pcs	
NO.	SPECIFICATION STANDARD	QT' Y	REMARK
	NEW	2018-2-9	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE REV.

Item No.	21.17.0050
Desc.	ROLINE Adaptor, LC Quad with Flange, OM5 Lime Green

SECOMP