


WIRING DIAGRAM(568B)

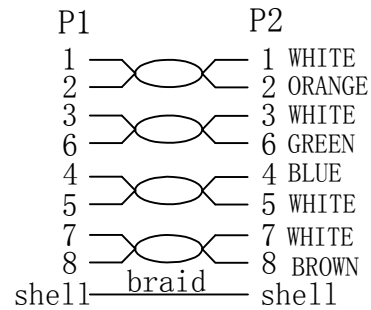

NOTE:

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT, MISS WIRE TEST
- (2). INSULATION RESISTANCE:DC 300V 10MΩ ;
- (3). CONDUCTOR RESISTANCE:3Ω Max (More than 3m, add one ohm per meter) ;

2. Fluke channel link test:

TEST LIMIT:ISO11801 Channel Class Ea

3. PRINT WORD:

CAT6A S/FTP 4x2x27AWG/7 LSZH ISO11801 & EN50173 & ANSI/TIA568C.2

4. ROHS2.0 & REACH COMPLIANT

5. Minimum of the bending radius is 50mm

(Suitable for all meters)

MATERIAL LIST

③	OVER MOLD	PVC 75A YELLOW(PANTONE 135C)	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 3u", Shell Nickel Plating , Transparence blue	2	
①	CABLE	S/FTP CAT. 6A 27AWG (Bare Copper*1P+AL-FOIL)*4PAIRS+BRAID (AL-MG) COLOUR:YELLOW/135C JACKET:LSZH OD:6.0±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW		2018-11-21 A
BY	CHK	REVISION RECORD MODIFICATION		DATE REV.

COLOUR: YELLOW (PANTONE 135C)		
ITEM NO.	LENGTH	TOLERANCE
21. 99. 1934	0. 3m	± 10mm
21. 99. 1930	0. 5m	± 15mm
21. 99. 1931	1m	± 30mm
21. 99. 1992	1. 5m	± 45mm
21. 99. 1932	2m	± 60mm
21. 99. 1933	3m	± 90mm
21. 99. 1935	5m	± 150mm
21. 99. 1936	7m	± 210mm
21. 99. 1937	10m	± 300mm
21. 99. 1938	15m	± 450mm
21. 99. 1939	20m	± 600mm

ITEM NO.	21. 99. 1934	21. 99. 1930	21. 99. 1931	21. 99. 1992	21. 99. 1932
	21. 99. 1933	21. 99. 1935	21. 99. 1936	21. 99. 1937	21. 99. 1938
	21. 99. 1939				
DESC.	VALUE S/FTP CAT. 6a Patch Cord, yellow				

SECOMP