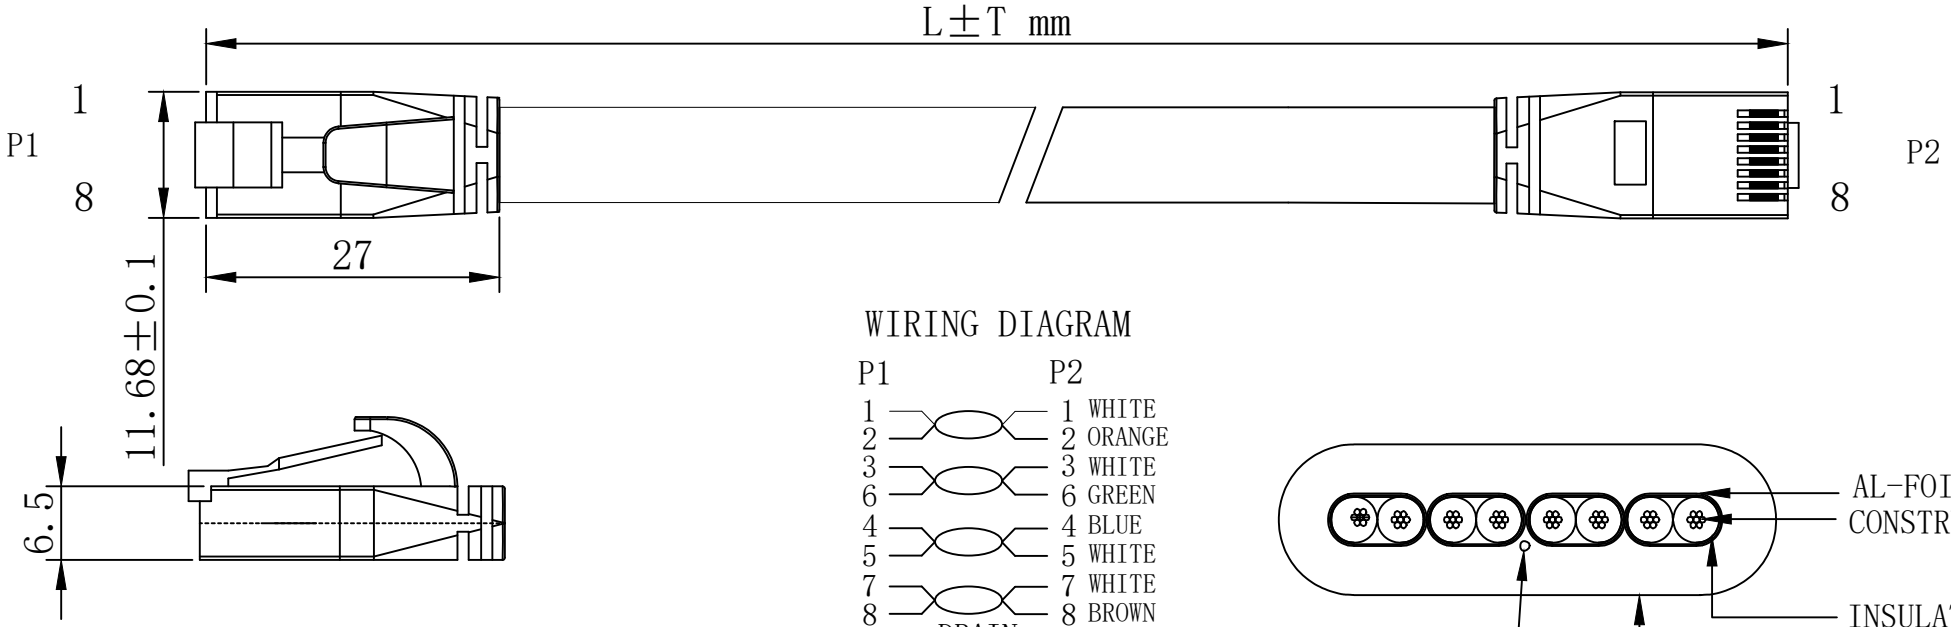

WIRING DIAGRAM

P1		P2
1		1 WHITE
2		2 ORANGE
3		3 WHITE
6		6 GREEN
4		4 BLUE
5		5 WHITE
7		7 WHITE
8		8 BROWN
SHELL	DRAIN	SHELL

NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke test
Test limit:ISO 11801 CHANNEL CLASS EA
3. PRINT WORD:CAT6A U/FTP FLAT 4x2x32AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568C.2
4. ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
③	OVER MOLD	PVC Colour Blue(Pantone 647C)	2	
②	CONNECTOR	RJ45 8P8C shielded Plug,Pin Gold Plated, Transparent Blue	2	
①	CABLE	(32AWG BC*1P+AL-FOIL)*4+E JACKET:PVC OD:2.0±0.2*6.5±0.2mm Blue(Pantone 647C)	1	

ITEM	LENGTH
21.99.2150	500±30mm
21.99.2151	1000±30mm
21.99.2154	1500±50mm
21.99.2152	2000±50mm
21.99.2153	3000±70mm
21.99.2155	5000±70mm

BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.
		NEW	2019-07-03	A

DESC. VALUE Cat.6A FTP PatchCord blue

SECOMP