

ZYXEL

Zyxel WAC500H 1200 Mbit/s Weiß Power over Ethernet (PoE)

Marke : Zyxel

Artikel-Code: WAC500H-EU0101F


Produktname : WAC500H

Zyxel WAC500H. 2,4 GHz, 5 GHz, Maximale Datenübertragungsrate: 1200 Mbit/s. Unterstützte Sicherheitsalgorithmen: EAP, SNMP, WEP, WPA, WPA2-Enterprise, WPA2-PSK, WPA3. Ethernet LAN Datentransferraten: 10,100,1000 Mbit/s. Power over Ethernet (PoE). Produktfarbe: Weiß



Merkmale		Energie	
2,4 GHz *	✓	AC Eingangsfrequenz	50 - 60 Hz
5 GHz *	✓	Eingangsstrom	0.3 A
Maximale Datenübertragungsrate *	1200 Mbit/s	Ausgangsspannung	12 V
Maximale Datenübertragungsrate (2,4 GHz)	300 Mbit/s	Ausgangsstrom	1 A
Maximale Datenübertragungsrate (5 GHz)	866 Mbit/s	Design	
Ethernet LAN Datentransferraten	10,100,1000 Mbit/s	Platzierung *	Wand
	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11k, IEEE 802.11n, IEEE 802.11r, IEEE 802.11v, IEEE 802.1x, IEEE 802.3af, IEEE 802.3at	Produktfarbe *	Weiß
Netzstandard		Antenne	
Kanalabstand	80 MHz	Antennentyp *	Intern
MIMO	✓	Antenne Zunahmenniveau (max)	4 dBi
MIMO-Typ	Multi User MIMO	Zertifikate	
WLAN-Multimedia (WMM)/(WME)	✓	Zertifizierung	FCC 15C, FCC 15E; ETSI EN 300 328, EN 301 893; LP0002, EN 60601-1-2 FCC 15B, EN 301 489-1; EN 301 489-17, EN55022, EN55024, EN61000-3-2/-3, BSMI CNS13438 EN 60950-1, IEC 60950-1; BSMI CNS14336-1
Schnelles Roaming	✓		
VLAN-Unterstützung	✓		
Kabellose Isolierung	✓	Gewicht und Abmessungen	
Bandsteuerung	✓	Breite	173 mm
Übermittlungsleistung	26 dBmW	Tiefe	97 mm
Empfängersensitivität	-99 dBm	Höhe	29 mm
		Gewicht	223 g
Sicherheit		Verpackungsdaten	
Unterstützte Sicherheitsalgorithmen *	EAP, SNMP, WEP, WPA, WPA2-Enterprise, WPA2-PSK, WPA3	Verpackungsbreite	195 mm
MAC Adressen Filtern	✓	Verpackungstiefe	120 mm
Automatisches kabelloses Verteilersystem (WDS)	✓	Verpackungshöhe	53 mm
		Paketgewicht	444 g
Management-Funktionen		Lieferumfang	
Web-basiertes Management	✓	Menge pro Packung	1 Stück(e)
Kommandozeilen-Schnittstelle (CLI)	✓	Montageset	✓

Anschlüsse und Schnittstellen		Betriebsbedingungen	
Anzahl Ethernet-LAN-Anschlüsse (RJ-45) *	3	Relative Luftfeuchtigkeit in Betrieb	10 - 90%
Gleichstrom-Anschluss (DC)	✓	Betriebstemperatur	0 - 50 °C
Energie		Temperaturbereich bei Lagerung	-30 - 70 °C
Power over Ethernet (PoE) *	✓	Luftfeuchtigkeit bei Lagerung	10 - 90%
AC Eingangsspannung	100 - 240 V	Logistikdaten	
		Warentarifnummer (HS)	85176990

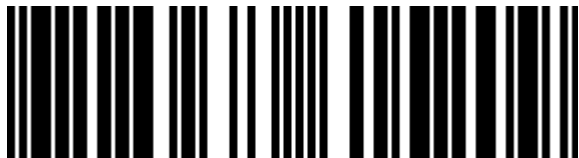

4718937615209



4172937615209

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 09-OCT-2024. Prints or copies of Information are only valid on the printed Publication date