

## WV-S4576LA

12MP Sensor IR Outdoor 360 Fisheye Network Camera with AI engine

# Edge AI 360-degree fisheye camera for video surveillance and business intelligence



- 12MP Outdoor 360-degree fisheye camera
- Up to 3 Edge AI analytic apps
- Built-in IR-LED(14m, 45ft)
- IP66, IK10 certified
- Built-in FIPS 140-2 Level 3 Certified SecureElement (EdgeLock® SE050F NXP® Semiconductors)
- NDAA Compliant























# **SPECIFICATIONS**

| Camera                       |   |
|------------------------------|---|
| Image Sensor                 | Approx. 1/2 type 12MP CMOS image sensor   |
| Minimum Illumination         | Color: 0.3 lx BW: 0.04 lx (F1.9, Maximum shutter: Off (1/30 s), AGC: 11) BW: 0 lx (F1.9, Maximum shutter: Off (1/30 s), AGC: 11, when the IR LED is lit) Color: 0.02 lx BW: 0.003 lx (F1.9, Maximum shutter: max. 16/30s, AGC: 11)                |
| Intelligent Auto             | On / Off  |
| Maximum Shutter              | max. 16/30s to Max. 1/10000s  |
| Wide Dynamic Range           | On / Off, The level can be set in the range of 0 to 31.   |
| Dynamic Range                | Max.84 dB<br>(Wide Dynamic Range : On, level : 31)  |
| lmage Settings               | Gain (AGC), White balance   |
| Image Compensation           | Adaptive black stretch, Back light compensation (BLC), Fog compensation, High light compensation (HLC), Digital noise reduction   |
| Color/BW (ICR)               | Off / On (IR Light Off) / On (IR Light On) / Auto1 (IR Light Off) / Auto2 (IR Light On) / Auto3 (SCC)   |
| IR LED Light                 | High* / Middle / Low / Off  *Maximum irradiation distance : 14 m{Approx. 45 ft}(30IRE), 10 m {Approx. 33 ft} (Mounting height : Approx. 3 m, Peripheral intensity control : On)   |
| Video Motion Detection (VMD) | On / Off,<br>4 areas available  |
| Scene Change Detection (SCD) | On / Off,<br>1 areas available  |
| Audio Detection              | On / Off  |
| Al Sound Classification      | Gunshot, Yell, Vehicle horn, Glass break  |
| Al Analytics                 | AI-VMD/AI People Counting for 360-degree fisheye camera, AI Privacy Guard for 360-degree fisheye camera, AI Scene Change Detection  |
|                              | For details: https://i-pro.com/products_and_solutions/en/surveillance/products/analytics-software 3rd party applications are also available. https://i-pro.com/products_and_solutions/en/surveillance/solutions/edge-ai-platform/application-list |
| Privacy Zone                 | On / Off, Up to 8 zones available   |
| Camera Title (OSD)           | On / Off, Up to 20 characters (alphanumeric characters, marks)  |
| Fixing angle adjustment      | -5°, 0°, +5°  |

| Lens                      |                                      |
|---------------------------|--------------------------------------|
| Zoom Ratio                | 1x                                   |
| Digital (Electronic) Zoom | Choose from 3 levels of x1, x2, x4   |
| Focal Length              | 1.4 mm {1/16 inches}                 |
| Maximum Aperture Ratio    | 1:1.9                                |
| Focus Range               | 0.5 m {19-11/16 inches} - ∞          |
| Angular Field of View     | Horizontal : 183°<br>Vertical : 183° |

| DORI  |   |
|---|---|
| Distance to the object in the center of the image       | Detect (25 ppm / 8 ppf) : 29.9 m / 98.2 ft<br>Observe (62.5 ppm / 19 ppf) : 12.0 m / 39.3 ft<br>Recognize (125 ppm / 38 ppf): 6.0 m / 19.6 ft<br>Identify (250 ppm / 76 ppf) : 3.0 m / 9.8 ft   |
| Coverage radius when mounted at a height of 3 m (10 ft) | Detect (25 ppm / 8 ppf) : 56.1 m / 184.2 ft Observe (62.5 ppm / 19 ppf) : 20.6 m / 67.6 ft Recognize (125 ppm / 38 ppf) : 8.4 m / 27.6 ft Identify (250 ppm / 76 ppf) : 0.3 m / 0.9 ft  |
| System on Chip (SoC)                                    |   |
| System on Chip (SoC)                                    | Ambarella CV22  |
| Browser GUI   |   |
| Camera Control  | Brightness, AUX On / Off  |
| Audio   | Mic (Line) Input: On / Off Volume adjustment: Low / Middle / High<br>Audio Output: On / Off Volume adjustment: Low / Middle / High  |
| GUI / Setup Menu Language                               | English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese   |
| Network   |   |
| Network IF  | 10Base-T / 100Base-TX, RJ45 connector   |
| Resolution <ceiling> <wall></wall></ceiling>            | •Fisheye mode (max. 30 fps/25 fps) 2992×2992 / 2192×2192 / 1280×1280 / 640×640 / 320×320 •Quad PTZ mode (max. 15 fps/12.5 fps), Single PTZ mode (max. 15 fps/12.5 fps) 2560×1920*3 / 2048×1536 / 1600×1200 / 1280×960 / 800×600 / VGA / QVGA  |
| Resolution <ceiling></ceiling>                          | Double Panorama mode (max. 15 fps/12.5 fps)     2560×1440 / 1920×1080   1280×720   640×360   320×180     Fisheye + Double Panorama mode (max. 15 fps/12.5 fps)     (Fisheye) 2992×2992   2192×2192   1280×1280   640×640   320×320     (Double Panorama) 1280×720   640×360   320×180     Fisheye + Quad PTZ mode (max. 15 fps/12.5 fps)     (Fisheye) 2992×2992   2192×2192   1280×1280   640×640   320×320     (Quad PTZ) 1280×960   800×600   VGA   QVGA     •Quad streams mode     (Single PTZ (Quad streams)) 1280×960   800×600   VGA   QVGA (max. 15 fps/12.5 fps)     (Quad PTZ) 2560×1920   2048×1536   1600×1200   1280×960   800×600   VGA   QVGA (max. 5 fps) |
| Resolution <wall></wall>                                | •Panorama mode (max. 15 fps/12.5 fps) 2560×1440 / 1920×1080 / 1280×720 / 640×360 / 320×180 •Fisheye + Panorama mode (max. 15 fps/12.5 fps) (Fisheye) 2992×2992 / 2192×2192 / 1280×1280 / 640×640 / 320×320 (Panorama) 1280×720 / 640×360 / 320×180  |
| H.265/H.264   | Transmission Mode : Constant bit rate / VBR / Frame rate / Best effort Transmission Type : Unicast port (AUTO) / Unicast port (MANUAL) / Multicast  |
| JPEG  | Image Quality :10 steps   |
| Smart Coding  | GOP (Group of pictures) control: On (Frame rate control)* / On (Advanced)* / On (Mid) / On (Low) / Off *On (Frame rate control) and On (Advanced) are only available with H.265. Auto VIQS: On / Off  |
| Audio Compression                                       | G.726 (ADPCM): 16 kbps / 32 kbps ,G.711: 64 kbps, AAC-LC: 64 kbps / 96 kbps / 128 kbps  |
| Supported Protocol                                      | IPv6: TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, SMTP, DNS, NTP, SNMPv1/v2/v3, DHCPv6,RTP, MLD, ICMP, ARP, IEEE 802.1X, DiffServ, FTP, SFTP, MQTT, LLDP IPv4: TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, RTSP, RTP, RTP/RTCP, SMTP, DHCP, DNS, DDNS, NTP, SNMPv1/v2/v3, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ, SRTP, FTP, SFTP, MQTT, LLDP   |
| Max. concurrent access number                           | Up to 14 users (Depends on network conditions)  |
| Secure  | FIPS 140-2 level 3 (NXP® EdgeLock® SE050F), Device Certificate GlobalSign® pre-installed, HTTPS, User authentication, Digest authentication, Host authentication, IEEE802.1X, System log, Image transmission log, Brute-force protection, Alteration detection  |
| SDXC/SDHC/SD Memory Card (Option)                       | H.265 / H.264 recording: Manual REC / Alarm REC (Pre/Post) / Schedule REC JPEG recording: Manual REC / Alarm REC (Pre/Post) Compatible SDXC/SDHC/SD card: 2 GB, 4 GB*, 8 GB*, 16 GB*, 32 GB*, 64 GB**, 128 GB**, 256 GB**, 512GB**model *SDHC card, ** SDXC card (except miniSD card and microSD card)  |

| Mobile Terminal Compatibility      | iPad / iPhone, AndroidTM terminals  |
|------------------------------------|---|
| ONVIF Profile                      | G/M/S/T   |
| Alarm                              |   |
| Alarm Source                       | 3 terminals input, VMD, Command alarm   |
| Alarm Actions                      | SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification, Indication on browser, TCP alarm notification output   |
| Input/Output                       |   |
| Monitor output (for adjustment)    | VBS : 1.0 V [p-p] / 75 $\Omega$ , composite, ø3.5 mm mini jack An NTSC or PAL signal can be outputted from camera   |
| Audio Input                        | [For microphone] ø3.5 mm stereo mini jack, Recommended applicable microphone : Plug-in power type (Sensitivity of microphone : $-48$ dB $\pm 3$ dB (0 dB=1 V / Pa,1 kHz)) Input impedance : Approx. 2 k $\Omega$ (unbalanced) Supply voltage : 2.5 V $\pm 0.5$ V [For line] Input level : Approx. $-10$ dBV |
| Audio Output                       | ø3.5 mm stereo mini jack (monaural output)<br>Output impedance : Approx. 600 $\Omega$ (unbalanced)<br>Output level : –20 dBV  |
| External I/O Terminals             | ALARM IN1 (Alarm input 1/ Black & white input/ Auto time adjustment input) (x1) ALARM IN2 (Alarm input 2/ ALARM OUT) (x1) ALARM IN3 (Alarm input 3/ AUX OUT) (x1)   |
| General                            |   |
| Safety                             | UL (UL62368-1), c-UL (CSA C22.2 No.62368-1), CE, IEC62368-1   |
| EMC                                | FCC (Part15 ClassA), ICES003 ClassA, EN55032 ClassB, EN55035, ECE-R10, EN50498 compliant, EN50121   |
| Power Source and Power Consumption | DC power supply : DC 12 V 1.1 A/Approx. 13.2 W PoE (IEEE802.3af compliant) Device : DC 48 V 270 mA/Approx. 12.95 W (Class 0 device)   |
| Ambient Operating Temperature      | IR LED : On -40 °C to +50 °C (-40 °F to 122 °F) Off -40 °C to +60 °C (-40 °F to 140 °F)   |
| Ambient Operating Humidity         | 10 to 100 % (no condensation)   |
| Anti-Condensation System           | Rosahl element  |
| Water and Dust Resistance          | IP66 (IEC60529), Type 4X(UL50), NEMA 4X compliant   |
| Shock Resistance                   | 50J (IEC 60068-2-75 compliant),<br>IK10 (IEC 62262)   |
| Wind Resistance                    | Up to 40 m/s {approx. 89 mph}   |
| Railway Application                | EN50155-TX  |
| Dimensions                         | When using the attachment plate only:  ø154 mm × 60.3 mm (H) {ø6-1/16 inches × 2-3/8 inches (H)}  Dome radius 35 mm {1-3/8 inches}  When using the base bracket:  ø164 mm × 96.3 mm (H) {ø6-15/32 inches × 3-25/32 inches (H)}  Dome radius 35 mm {1-3/8 inches}  |
|                                    |   |
| Mass (Approx.)                     | When using the attachment plate only : Approx. 880 g {1.94 lbs}, When using the base bracket : Approx. 1.3 kg {2.87 lbs}  |

## **NOTES**

#### Important

- Safety Precautions: Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
- i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.

- Masses and dimensions are approximate.
- Specifications are subject to change without notice.

Trademarks and registered trademarks

- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC.
- ONVIF is a trademark of ONVIF, Inc.
- All other trademarks identified herein are the property of their respective owners

©i-PRO Co., Ltd All rights reserved / March 2023

## **Bundled License**

## ■ AI-VMD/AI People Counting with the 360-degree fisheye camera

#### AI Video Motion Detection

- All differentiates between vehicles and people, detecting and sending warning notifications when an intruder enters a specified area.
- Intruder detection:

Issues an alarm when a moving object enters a specified area.

• Cross Line detection:

Issues an alarm when an object moving in the specified direction crosses a specified threshold.

• Loitering detection:

Issues an alarm when a moving object enters a specified area and stays there for a specified amount of time.




#### **People Counting**


• Cross Line Counting:


Counts the number of people moving in a specified direction and cross a specified threshold.

Area Counting(Queue Management):

Counts the number of people in the set area.








Area Counting

#### Heat map

• Heat mapping provides statistical information about traffic flow and keeps counts for people passing through and loitering in the area.





#### **Occupancy detection**

• The network camera uses its Al engine to detect congestion, providing data that can be used to direct visitor traffic flow in advance or help staff work more efficiently.



### ■ Al Privacy Guard for 360-degree fisheye

#### Al Privacy Guard

• Al can automatically mosaic faces and figures of people who are photographed to safeguard privacy and portrait rights.



Original image




**Processed image** 




#### i-PRO Active Guard

• The i-PRO Active Guard stores the best images and metadata captured by i-PRO network cameras, then collates this data with the watch list registered in the client software and issues an alarm when a match is found. The server does not require expensive hardware because i-PRO network cameras handle the advanced processing. The server can even be installed on the same hardware as the VMS. The system comprises the i-PRO Active Guard, the Al application installed on i-PRO network cameras utilizing Al engines, and i-PRO Active Guard Plug-in software for the VMS client.

#### **Example of basic system connection** (without i-PRO Active Guard)

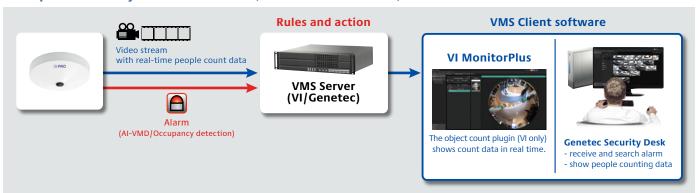


#### Example of basic system connection (with i-PRO Active Guard) for Video Insight/Genetec

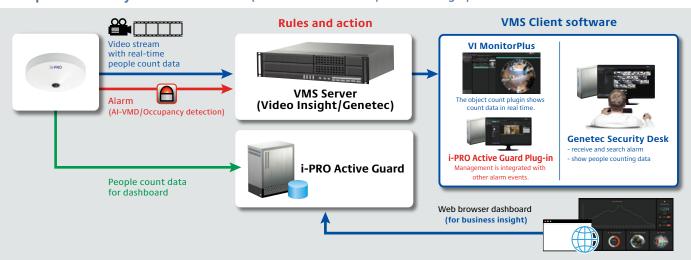

\*VMS Server and i-PRO Active Guard can be installed on the same server.

#### Example of basic system connection for WV-ASM300W/Network disk recorder

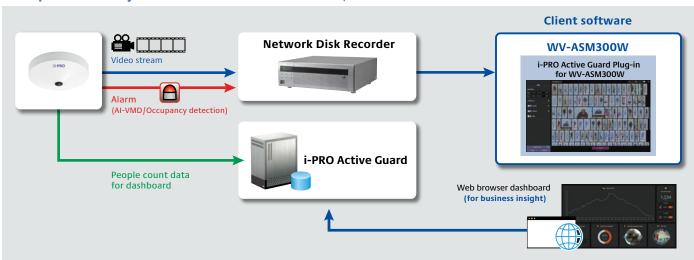



# **OPTIONAL ACCESSORIES**

## Select a compatible accessory

Accessory Selector (i-pro.com)



WV-Q105A Mount Bracket



WV-QCL100-W Mount Bracket



WV-QCL101-W Mount Bracket



WV-QCL102-W Universal Camera Mount Bracket



WV-QCL501-W Mount Bracket



WV-QCN500-W Mount Bracket



WV-QJB500-W Mount Bracket



WV-QJB504-W Base Bracket



WV-QLR100-W Light Rail Mount Bracket



WV-QPL500-W Mount Bracket



WV-QSR501-W Mount Bracket



WV-QWL500-W Mount Bracket



WV-QWL501-W Mount Bracket



WV-S25F1 Unit



WV-PM500 Compact microphone unit for surveillance cameras

