

# Thunderbolt 3 Multiport Dock with Power Charging

## UH7230


- The UH7230 Thunderbolt 3 Multiport Dock connects a computer to an Ethernet, DisplayPort, USB-C 3.1 Gen 1, speaker and microphone ports through a single cable. The all-in-one dock provides a total of 8 ports and is designed to instantly connect and disconnect from your Thunderbolt 3 laptop. The UH7230 features single Thunderbolt monitor with resolution up to 5K (5120 x 2880 @ 60Hz), dual 4K (4096 x 2160 @ 60Hz) multi-display setups on a DisplayPort and a Thunderbolt or a USB-C displays. Gigabit Ethernet port delivers Internet speeds up to one Gigabit (1000 Mbps). This multiport dock also supports USB Power Delivery 2.0, which means the UH7230 can provide power to matched USB-C Windows or Mac laptops with PD Profile specifications of 20V/4.25A, 15V/3A, 9V/3A and 5V/3A.

The UH7230 Thunderbolt 3 Multiport Dock is ideal for quickly connecting peripherals and displaying video content from a laptop - at work, school or home. It allows you to add an additional monitor for enhanced multitasking, designing and viewing of movies or photos in high definition. It is a perfect desktop companion for your Thunderbolt 3 enabled computer.



## Features

- Supports both Thunderbolt 3 (40Gbps) and USB 3.1 Gen2 (10Gbps) protocol through a single Thunderbolt 3 cable
- Connect 8 devices to a laptop via a single Thunderbolt 3 cable / Daisy-chain 5 additional Thunderbolt devices
- Supports 5K resolution on single Thunderbolt 3 display or dual 4K resolution on one DisplayPort display and one USB-C / Thunderbolt 3 display
- 85W Universal Power Delivery for charging a Thunderbolt 3 PC or Macbook pro ; supports 20V/4.25A, 15V/3A, 9V/3A and 5V/3A power specification for the output power
- Compatible with legacy Thunderbolt devices via adapter
- Gigabit Ethernet port
- Audio line-in and line-out
- OS Support: Windows 10 32/64 bit, and OS X Sierra 10.12 later

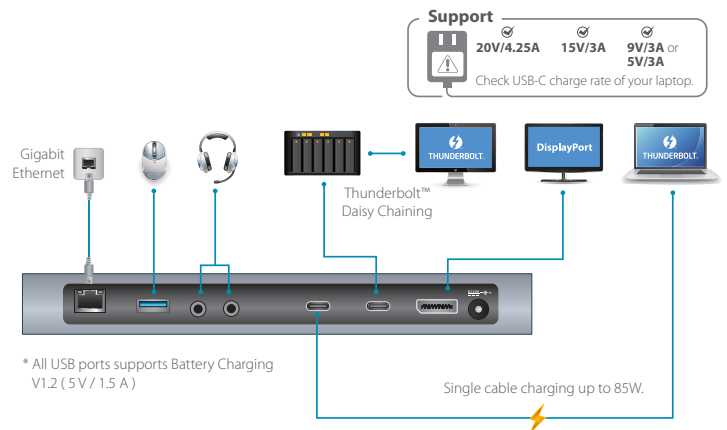

## Specifications

Function	UH7230
<b>Computer Connections</b>	1 Thunderbolt Computer
<b>Device Connections</b>	5 Max. (via Thunderbolt Daisy-chaining)
<b>Connectors</b>	
Computer	1 x Thunderbolt 3 (USB-C) Female (Black)
Device	1 x Thunderbolt 3 (USB-C) Female (Black) 3 x USB3.1 Gen1 Type-A Female (Blue) 1 x USB3.1 Gen1 Type-C Female (Black)
LAN Ports	1 x Gigabit Ethernet Female (Black)
Audio Inputs	1 x 3.5mm Stereo Input Female (Black)
Audio Outputs	1 x 3.5mm Stereo Output Female (Black)
Power Jack	1
Video Output	1x DisplayPort Female 1x Thunderbolt 3 (USB-C) Female
<b>Video Resolution</b>	<b>Single View:</b> Thunderbolt 3 (USB-C) Monitor - 5K @ 60 USB-C Monitor - 4096 x 2160 @ 60 DisplayPort Monitor - 4096 x 2160 @ 60 <b>Dual View:</b> Thunderbolt 3 (USB-C) Monitor or USB-C Monitor - 4096 x 2160 @ 60 DisplayPort Monitor- 4096 x 2160 @ 60
<b>Power</b>	
Consumption	DC20V , 170W
<b>Package Contents</b>	1 x Thunderbolt 3 (USB-C) Cable 1 x Power Adapter w/ AC power cord
<b>Environmental</b>	
Operating Temperature	0° to 40° C
Storage Temperature	-20° to 60° C
Humidity	0 - 80% RH, Non-condensing
<b>Physical Properties</b>	
Housing	Aluminum
Weight	0.37 kg
Dimensions (L x W x H)	22.20 x 8.20 x 2.60 cm

Product information is subject to change without prior notice.

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 12/2017 V1.0



© Copyright 2017 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.